

ONKYO® SERVICE MANUAL


COMPACT DISC PLAYER MODEL DX-7911

DX-7711

Black model/Silver model/Golden model

UD	120V AC, 60Hz
UP	230V AC, 50Hz
UW	120/220V AC, 50/60Hz

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY MARK  ON THE SCHEMATIC DIAGRAM AND IN THE PARTS LIST ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE THESE COMPONENTS WITH ONKYO PARTS WHOSE PARTS NUMBERS APPEAR AS SHOWN IN THIS MANUAL.

MAKE LEAKAGE-CURRENT OR RESISTANCE MEASUREMENTS TO DETERMINE THAT EXPOSED PARTS ARE ACCEPTABLY INSULATED FROM THE SUPPLY CIRCUIT BEFORE RETURNING THE APPLIANCE TO THE CUSTOMER.



SPECIFICATION

Compact Disc Player	Model DX-7911
Signal readout system:	Optical non-contact
Reading rotation:	About 500 - 200 r.p.m. (constant linear velocity)
Linear velocity:	1.2 - 1.4 m/s
Error correction system:	Cross Interleave Reed-Solomon code
D/A converter:	1 bit PWM ACCUPULSE D/A CONVERTER
Sampling frequency:	352.8 kHz (Eight-times oversampling)
Number of channels:	2 (stereo)
Frequency response:	2 Hz - 20 kHz
Total harmonic distortion:	0.0025 % (at 1 kHz)
Dynamic range:	110 dB
Signal to noise ratio:	110 dB
Channel separation:	108 dB (at 1 kHz)
Wow and Flutter:	Below threshold of measurability
Output level:	2 volts r.m.s.
Headphone jack:	1 Optimum load impedance 8 to 200 ohms
Power consumption:	26 watts
Power supply rating:	European and Australian models: AC 230 V, 50 Hz USA and Canadian models: AC 120 V, 60 Hz Worldwide model: AC 120 V and AC 220-230V switchable, 50/60 Hz
Dimensions (W × H × D):	435 × 131 × 365 mm (17-1/8" × 5-3/16" × 14-3/8")
Weight:	10.5 kg, 23.1 lbs.

Specifications and external appearance are subject to change without notice because of product improvements.

TABLE OF CONTENTS

Specification	1
Service procedures	2
Laser warning label	3
Chassis exploded view	4
Chassis exploded view parts list	5
Mechanism exploded view	6
Mechanism exploded view parts list	7
Microprocessor connection diagram	8
Microprocessor terminal description	9
IC block diagram and description	10-15
Caution on replacement of pickup	16
Adjustment procedure	17
Block diagram	18
Parts list	19-20
Printed circuit board view from bottom side	21-24
Schematic diagram	25-26
Packing view	27

SERVICE PROCEDURES


1. How to Release the Transport Lock

To protect the optical assembly including the laser pickup from vibration related damage during shipping, this unit is equipped with a transport lock lever located on the base.

1. Loosen the screw with Phillips screwdriver.
2. Move the lock lever in the direction opposite that shown by the arrow. Move the lever up to the position where it can move no farther, and then remove the lever.

■ Tighten the screw to secure the lock lever.

- For shipping, restore the lock lever to its position in the direction of the arrow, then tighten down the screw to secure the lock lever in that position.

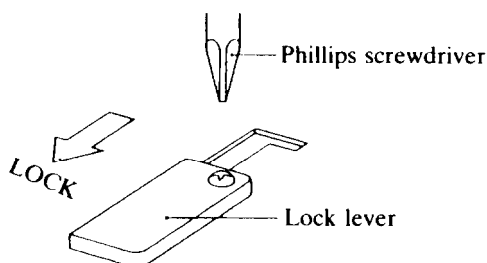

2. Use of batteries

- The remote control transmitter is powered by two batteries. Before using this unit for the first time, insert the two batteries (included).
- Average battery life is about one year. This period may be shorter depending on the frequency of use and environment (temperature and humidity) in which the remote control transmitter is used.

- If the remote control transmitter does not operate even though front panel controls function normally, the batteries should be replaced. Use only listed in the following chart.

Type	Voltage	Size
Manga- nese	1.5V	AA R6 UM-3

3. Safety check out

After correcting the original service problem, perform the following safety check before releasing the set to the customer:

Connect the insulating-resistance tester between the plug of power supply cable and chassis.

Specifications: more than 10Mohm at 500V.

4. Voltage selector (rear panel)

Worldwide models are equipped with a voltage selector to conform with local power supplies. Be sure to set this selector to match the voltage of the power supply in your area before turning the power switch on. Voltage is changed by turning the voltage selector with a screwdriver or similar instrument to the 120V or 220V position. Confirm that the selector has been set to the correct position before turning the power switch on. If there is no voltage selector switch on the unit you have purchased, it can only be used in areas where the power supply voltage is the same as that of the unit.

PROTECTION OF EYES FROM LASER BEAM DURING SERVICING

This set employs a laser. Therefore, be sure to follow carefully the instructions below when servicing.

WARNING!!

WHEN SERVICING, DO NOT APPROACH THE LASER EXIT WITH THE EYE TOO CLOSELY. IN CASE IT IS NECESSARY TO CONFIRM LASER BEAM EMISSION, BE SURE TO OBSERVE FROM A DISTANCE OF MORE THAN 30cm FROM THE SURFACE OF THE OBJECTIVE LENS ON THE OPTICAL PICK-UP BLOCK.





LASER WARNING LABELS

The label shown below are affixed.

1. Warning label

These labels are located on the rear panel and the arm of the mechanism.

- (A) **DANGER** —INVISIBLE LASER RADIATION WHEN OPEN AND INTERLOCK FAILED OR DEFEATED. AVOID DIRECT EXPOSURE TO BEAM
- CAUTION** —HAZARDOUS LASER AND ELECTROMAGNETIC RADIATION WHEN OPEN AND INTERLOCK DEFEATED
- ATTENTION** —RAYONNEMENT LASER ET ELECTROMAGNETIQUE DANGEREUX SI OUVERT AVEC L'ECLenchement DE SECURITE ANNULE.

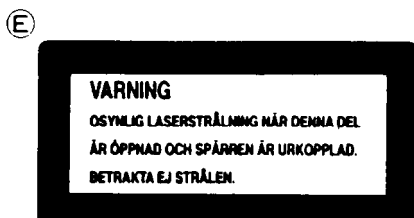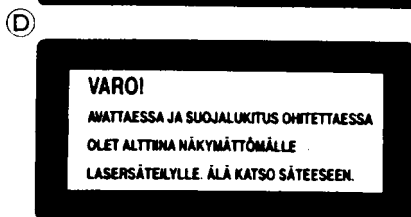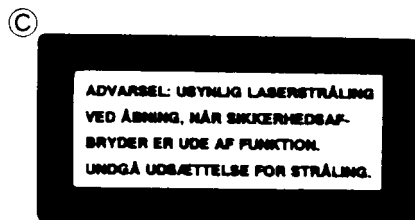


- (A) : Danger label
- (B) : Except 120V model
- (C) : Except 120V model
- (D),(E),(F) : Only 230V model

Laser Diode Properties

- Material: GaAs/GaAlAs
- Wavelength: 780nm
- Emission Duration: continuous
- Laser output: max. 0.5mW*

*This output is the value measured at a distance about 1.8mm from the objective lens surface on the Optical Pick-up Block.

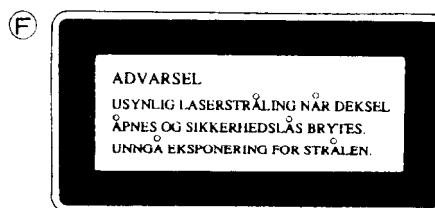

2. Certification label (120V model)


This label is located on the back panel.

PRODUCT IS CERTIFIED BY THE MANUFACTURER TO COMPLY WITH DHS RULES 21 CFR SUBCHAPTER J APPLICABLE AT THE DATE OF MANUFACTURE

MANUFACTURED

3. Class 1 label (Except 120V model)

This label is located on the back panel.

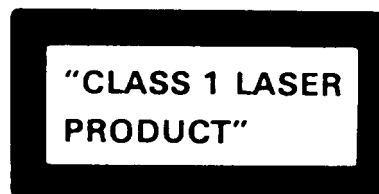

LUOKAN 1
LASERLAITE

KLASS 1
LASER APPARAT

ADVARSEL


Denna mækning er anbragt på apparatets højre side og indikerer, at apparatet arbejder med laserstråler af klasse 1, hvilket betyder, at der anvendes laserstråler af svageste klasse, og at man ikke på apparatets yderside kan blive udsat for utilsladelig kraftig stråling.

APPARATET BØ/R KUN ÅBNES AF FAGFOLK MED SÆRLIGT KENDSKAB TIL APPARATER MED LASERSTRÅLER!


Indvendigt i apparatet er anbragt den her gengivne advarselmærkning, som advarer imod at foretage sådanne indgreb i apparatet, at man kan komme til at udsætte sig for laserstråling.

VAROITUS! LAITTEEN KAYTTAMINEN MUULLA KUIN TASSA KAYTTOOHJEESSA MAINTULLA TAVALLA SAATTAÄ ALTISTÄÄ KAYTTAJAN TURVALLISUUSLUOKAN 1 YLITTAVALLE NÄKYMÄTTÖMÄLLE LASERSÄTEILYLLE.

SCHEMATIC DIAGRAM

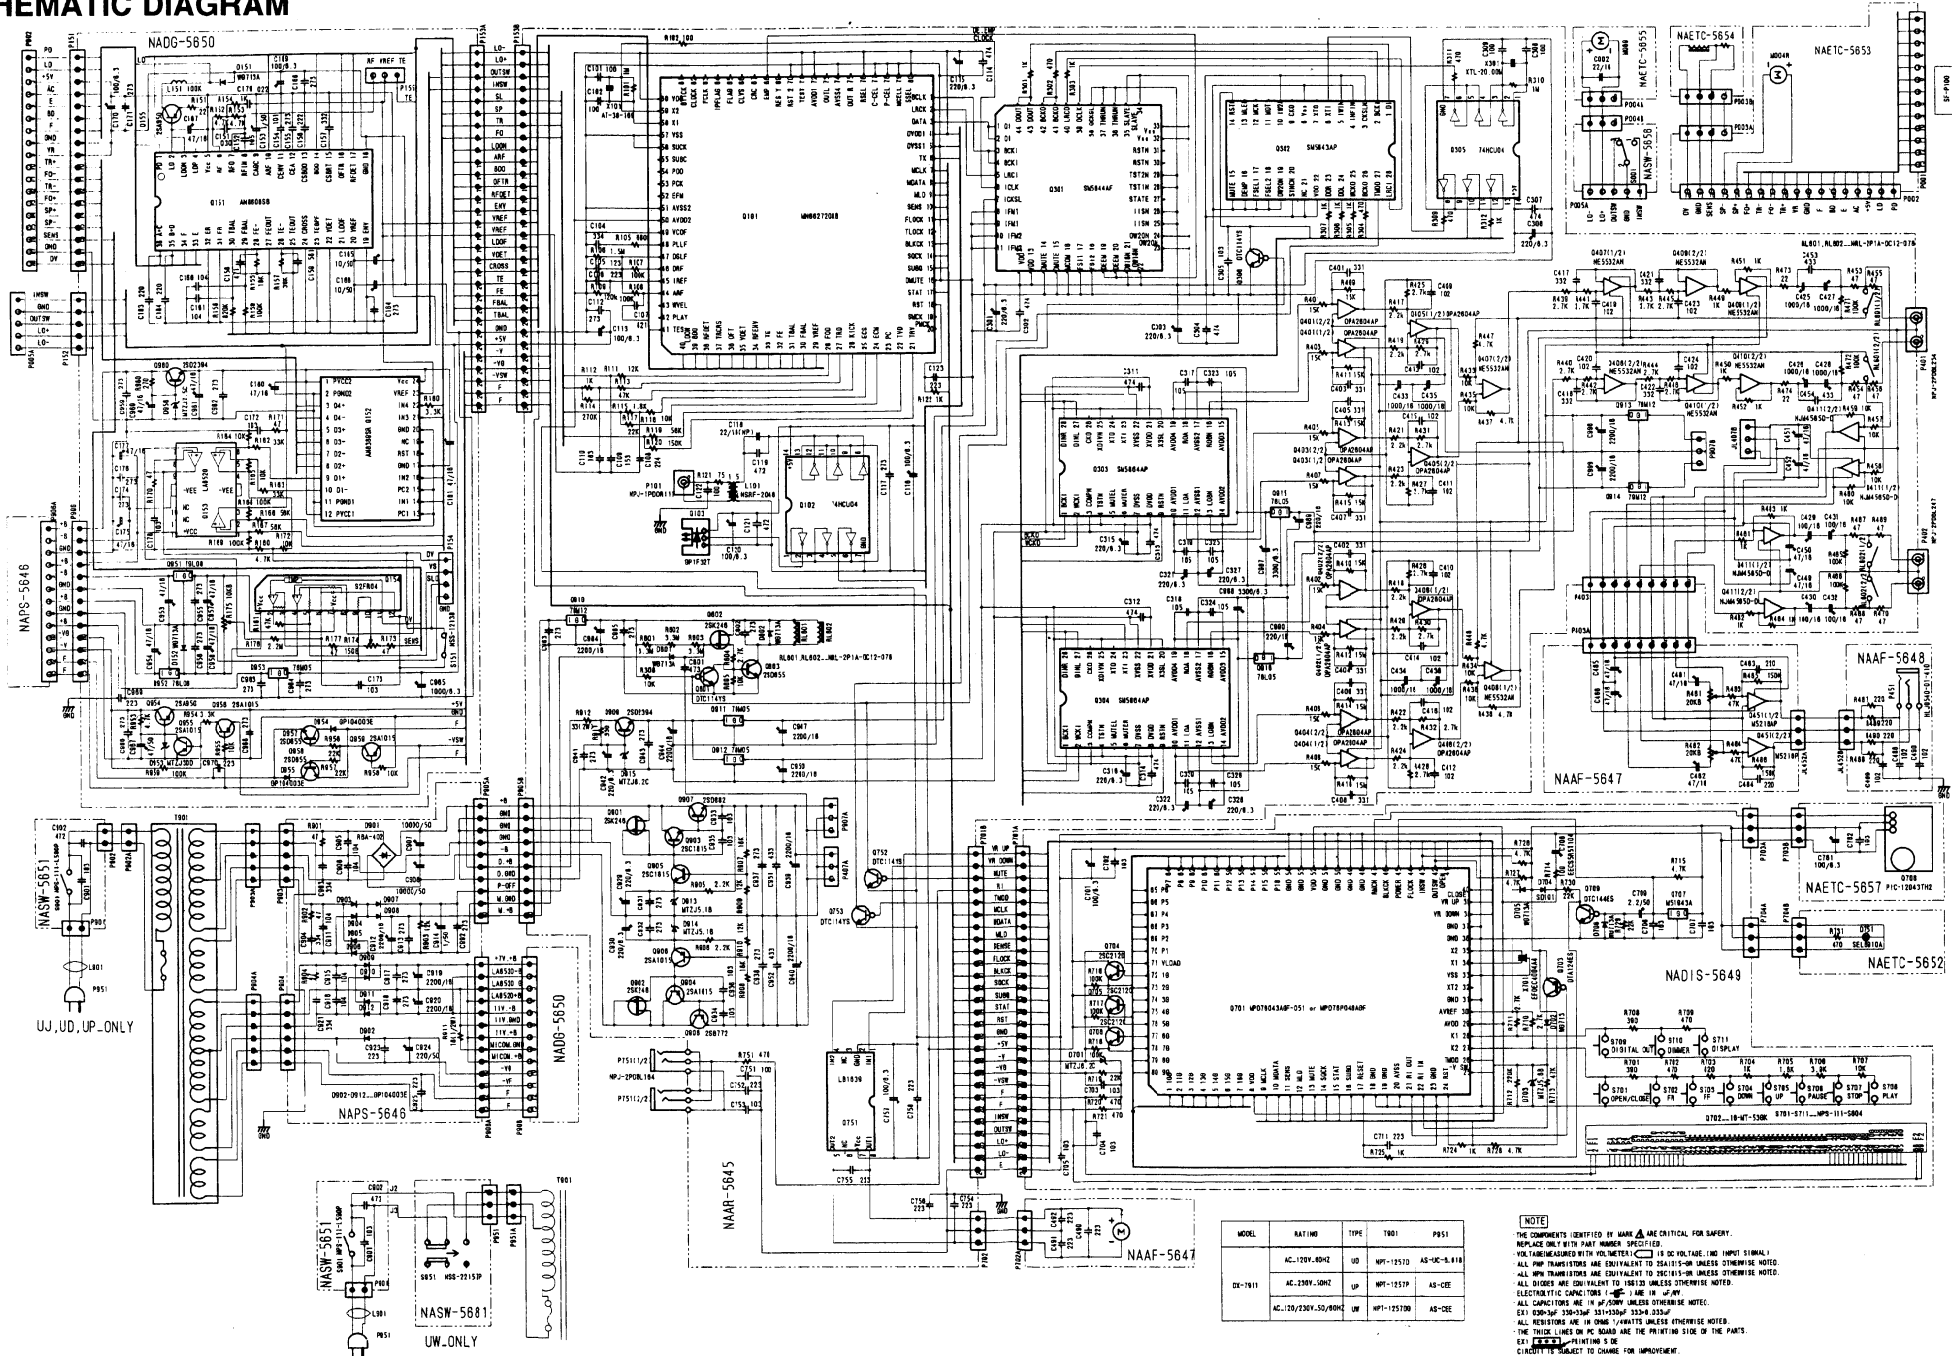


CHASSIS EXPLODED VIEW

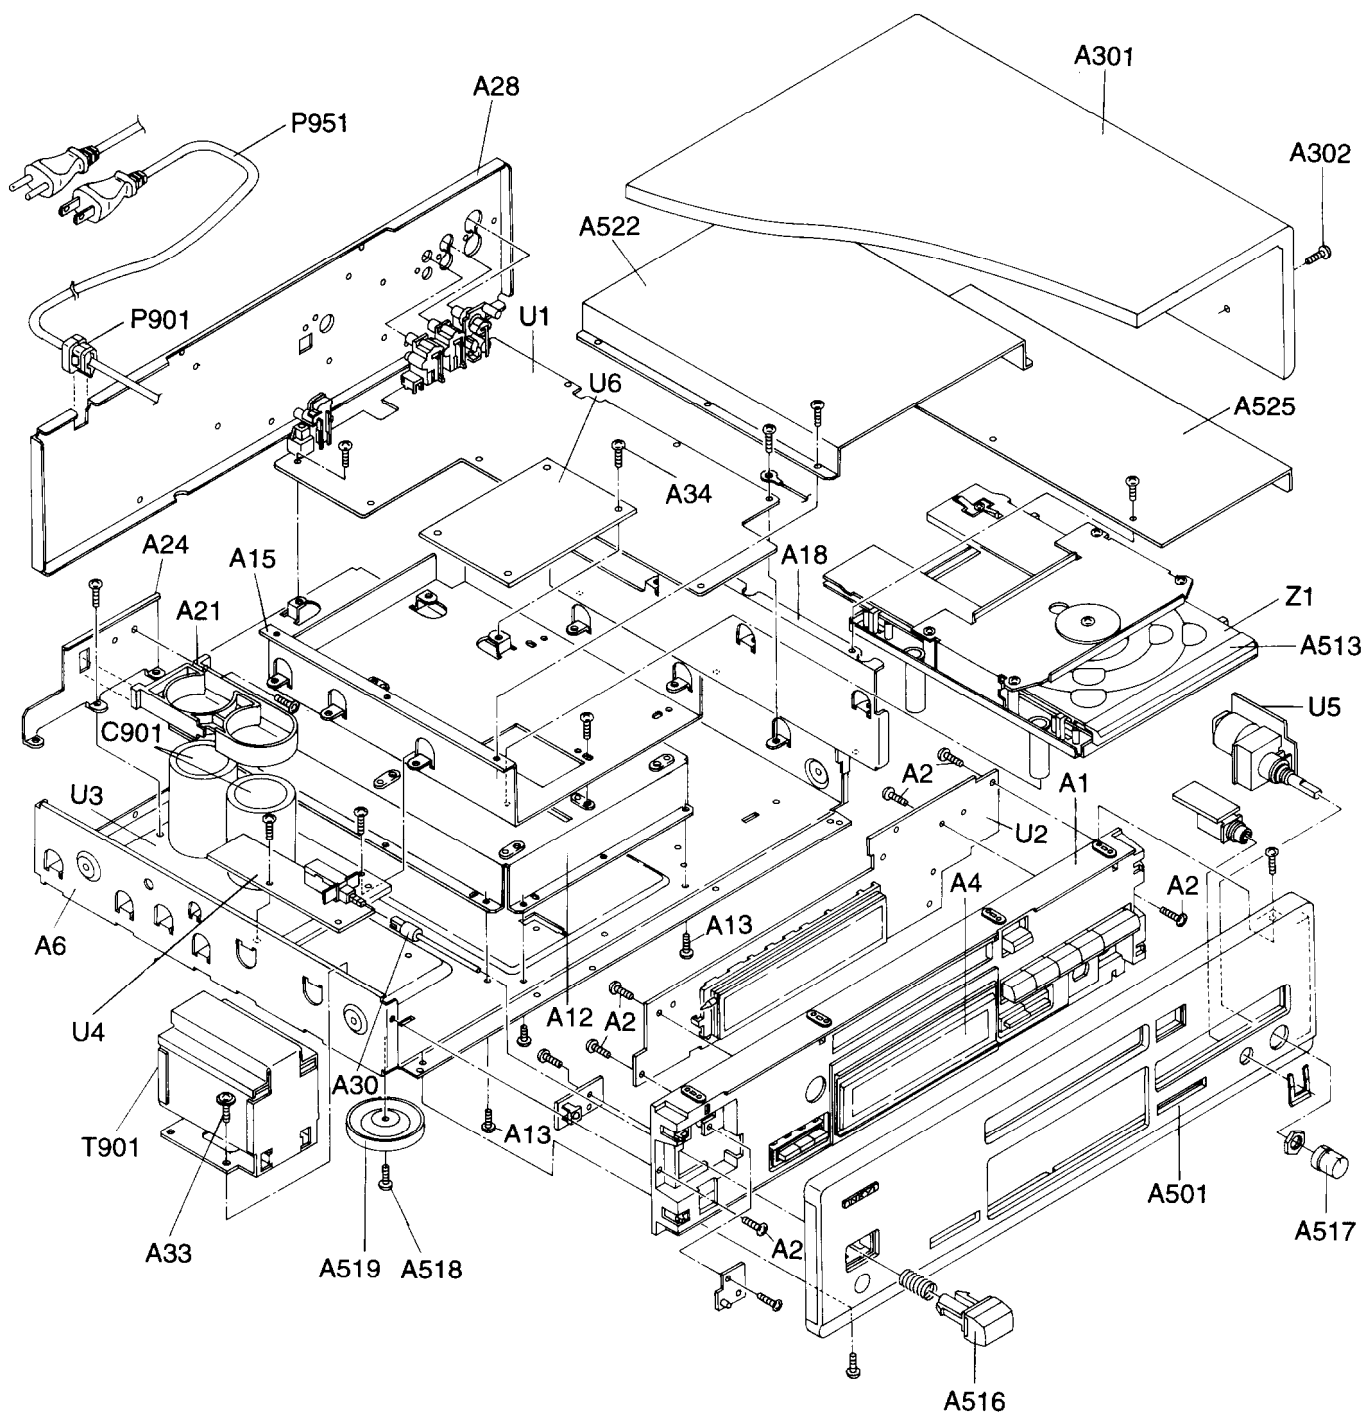

CHASSIS EXPLODED VIEW PARTS LIST

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
A1	27110913	FRONT BRACKET AS <S>	A519	27175311	LEG AS
	27110912	FRONT BRACKET AS 	A520	831430088	3TTW+8B(BC), SCREW
	27110904	FRONT BRACKET AS <G>	A522	28184632	COVER (M)
A2	838130088	3TTB+8B, SCREW	A523	838430088	3TTB+8B(BC), SCREW
A3	28133345	BACK PLAET <S,G>	A525	28184634	COVER (PC)
	28133349-1	BACK PLAET 	A526	838430088	3TTB+8B(BC), SCREW
A4	28191731	CLEAR PLATE	A528	27190972	HOLDER (L)
A6	27100308	CHASSIS	A529	838230088	3TTB+8B(Ni), SCREW
A7	838430088	3TTB+8B(BC), SCREW	C901	△ 3300001	CK45F250V 103Z, CAPACITOR
A9	27130768	BRACKET (KZ)	L901	230915	CORE
A10	838130088	3TTB+8B, SCREW	L901A	831430088	3TTW+8B(BC), SCREW
A12	27130765A	BRACKET (D)	P901	△ 27300750	CORD BUSHING
A13	838430088	3TTB+8B(BC), SCREW	P951	△ 253148	AS-CEE, AC CORD <P,W>
A15	27130766A	BRACKET (U)		△ 253196HIT	AS-BS, AC CORD <E>
A16	838130088	3TTB+8B, SCREW		△ 253168	AS-UC-6#18, AC CORD <D>
A18	27130764	BRACKET (PC)	T901	△ 2301151	NPT-1257P, POWER TRANSFORMER <P>
A19	838430088	3TTB+8B(BC), SCREW		△ 2301150	NPT-1257P, POWER TRANSFORMER <D>
A21	27190934BY	HOLDER (CH)		△ 2301152	NPT-1257DG, POWER TRANSFORMER <W>
A22	838130088	3TTB+8B, SCREW	U1	1H298545-1C	NAAR-5645-1C <P>
A24	27141655	RETAINER (C)		1H298545-1B	NAAR-5645-1B <D>
A25	838130088	3TTB+8B, SCREW		1H298545-1D	NAAR-5645-1D <W>
A27	831430088	3TTW+8B(BC), SCREW	U2	1H298549-1C	NADIS-5649-1C <P>
A28	27122175	REAR PANEL <P>		1H298549-1B	NADIS-5649-1B <D>
	27122174	REAR PANEL <D>		1H298549-1D	NADIS-5649-1D <W>
	27122176	REAR PANEL <W>	U3	1H298546-1C	NAPS-5646-1C <P>
A29	838430088	3TTB+8B(BC), SCREW		1H298546-1B	NAPS-5646-1B <D>
A30	27273161	JOINT (POW)		1H298546-1D	NAPS-5646-1D <W>
A33	830440109	4TTC+10C(BC), SCREW	U4	1H298551-1C	NASW-5651-1C <P>
A34	838130088	3TTB+8B, SCREW		1H298551-1B	NASW-5651-1B <D>
A301	28184640	TOP COVER <S>		1H298551-1D	NASW-5651-1D <W>
	28184639	TOP COVER 	U5	1H298547-1C	NAAF-5647-1C
	28184641	TOP COVER <G>		1H298547-1B	NAAF-5647-1B
A302	838240089	4TTB+8C(Ni), SCREW <S,G>		1H298547-1D	NAAF-5647-1D
	838440088	4TTB+8C(BC), SCREW 	U6	1H298550-1C	NADG-5650-1C
A303	838430088	3TTB+8B(BC), SCREW		1H298550-1B	NADG-5650-1B
A501	27211780	FRONT PANEL <S>		1H298550-1D	NADG-5650-1D
	27211779	FRONT PANEL 	E801	2046304012	NCFC6-304012, FLAT CABLE
	27211781	FRONT PANEL <G>	E802	2047271512	NCFC7-271512, FLAT CABLE
A509	28141288	10.8×19×15, CUSHION	E803	2046182012	NCFC6-182012, FLAT CABLE
A510	29110023	DF TAPE	E804	2061112200UL	CRIMP AS
A511	838430088	3TTB+8B(BC), SCREW	Z1	1H287122UJ	MECHA AS
A513	28148335	DOOR <S>	Z2	838130088	3TTB+8B(BC), SCREW
	28148334	DOOR 	Z3	838430088	3TTB+8B(BC), SCREW
	28148333	DOOR <G>			
A514	834426068	2.6TTS+6B(BC), SCREW			<S> : Silver model only
A516	28325265	KNOB (POW) AS <S>			 : Black model only
	28325264	KNOB (POW) AS 			<G> : Golden model only
	28325238	KNOB (POW) AS <G>			<D> : 120V model only
A517	28325277	KNOB (LEV) <S>			<P> : 230V model only
	28325276	KNOB (LEV) 			<W> : Worldwide model only
	28325243	KNOB (LEV) <G>			<N> : American model only
					<C> : Canadian model only
					<E> : British model only
					<A> : Australian model only
					<T> : Taiwanese model only
					<GN> : American golden model only


NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.

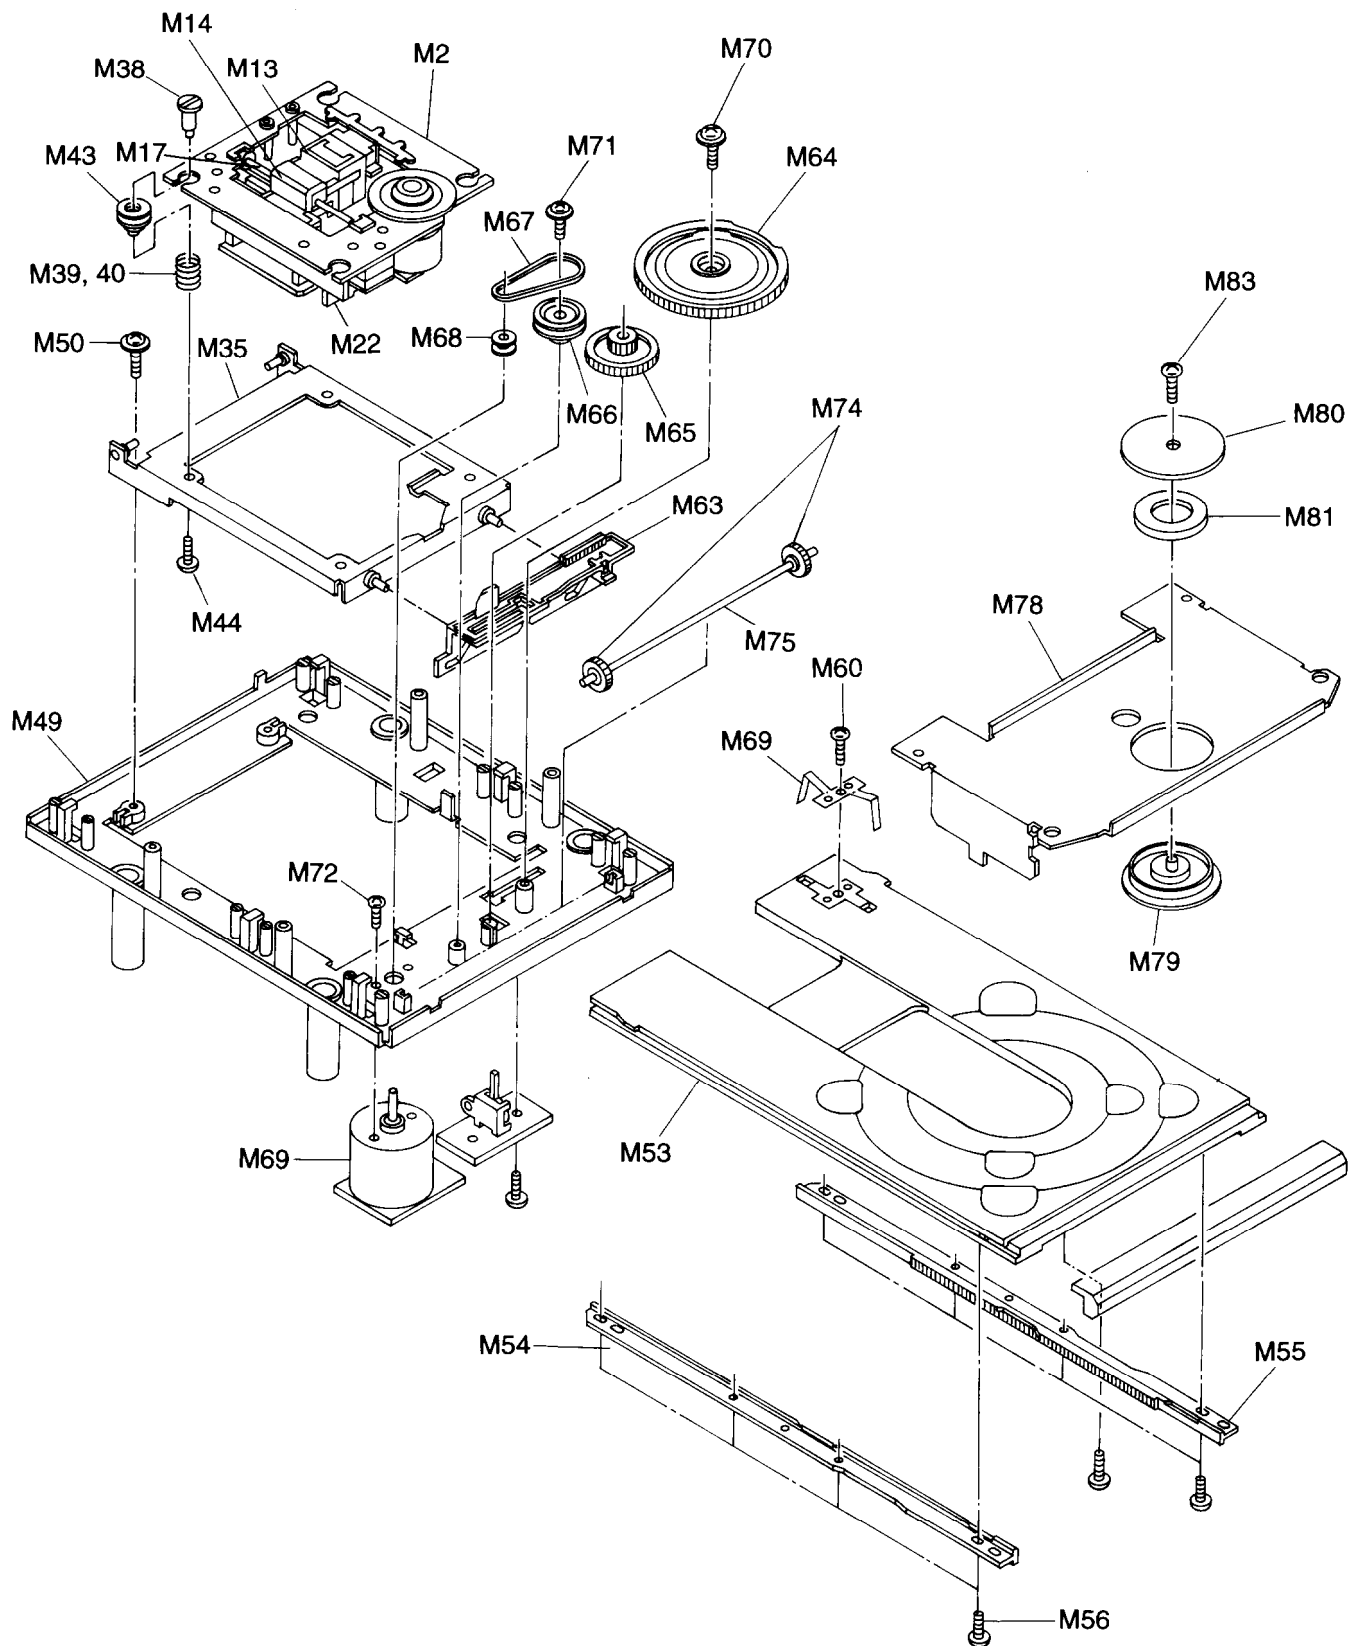MECHANISM-EXPLODED VIEW


MECHANISM-PARTS LIST

REF NO.	PART NO.	DESCRIPTION
M2	24802023	CHASSIS (PU)AS
M13	24804019	PICK UP
M14	24840100	BLOCK (RET)
M17	24828013	SHAFT (PU)
M18	27270322	SPACER
M19	27270323	SPACER
M21	24804020	LINEAR MOTOR
M35	24802020	CHASSIS (SUB)AS
M38	24826007	HOLDER (FLT)
M39	27180462	SPRING (FRG)
M40	27180461	SPRING (FLS)
M43	27301466A	CUSHION
M44	82142004	2P+4F(BC), SCREW
M49	24802022	CHASSIS (MAIN)
M50	831430088	3TTW+8B(BC), SCREW
M53	24840104	DISC TRAY
M54	24810032	RACK (L)
M55	24810033	RACK (R)
M56	834426068	2.6TTS+6B(BC), SCREW
M59	24820031	PLATE (E)
M60	838430088	3TTB+8B(BC), SCREW
M63	24810034	CAM PLATE
M64	24810035	GEAR (MAIN)
M65	24810036	GEAR
M66	24810037	PULLEY
M67	24816012	BELT
M68	27300859A	PULLEY MO
M69	24502234	MDH2B60, MOTOR
M70	831430088	3TTW+8B(BC), SCREW
M71	831126060	2.6TTW+6P, SCREW
M72	82113003	3P+3F, SCREW
M74	24810038	GEAR (SYN)
M75	24828015	SHAFT (SYN)
M78	24840102	PLATE (CH)
M79	24824005	CAP (CH)
M80	27301344	YOKE (CH)
M81	28181019A	MAGNET
M83	833426050	2.6TTP+5P(BC), SCREW
M85	838430088	3TTB+8B(BC), SCREW
M86	2061112060UL	CRIMP AS
M92	1H287553-1	NAETC-5653-1
M93	2049041022	NCFC9-041022, FFC
M94	2042131022	NCFC2-131022, FFC
M95	834426068	2.6TTS+6B, (BC), SCREW

MICROPROCESSOR CONNECTION DIAGRAM

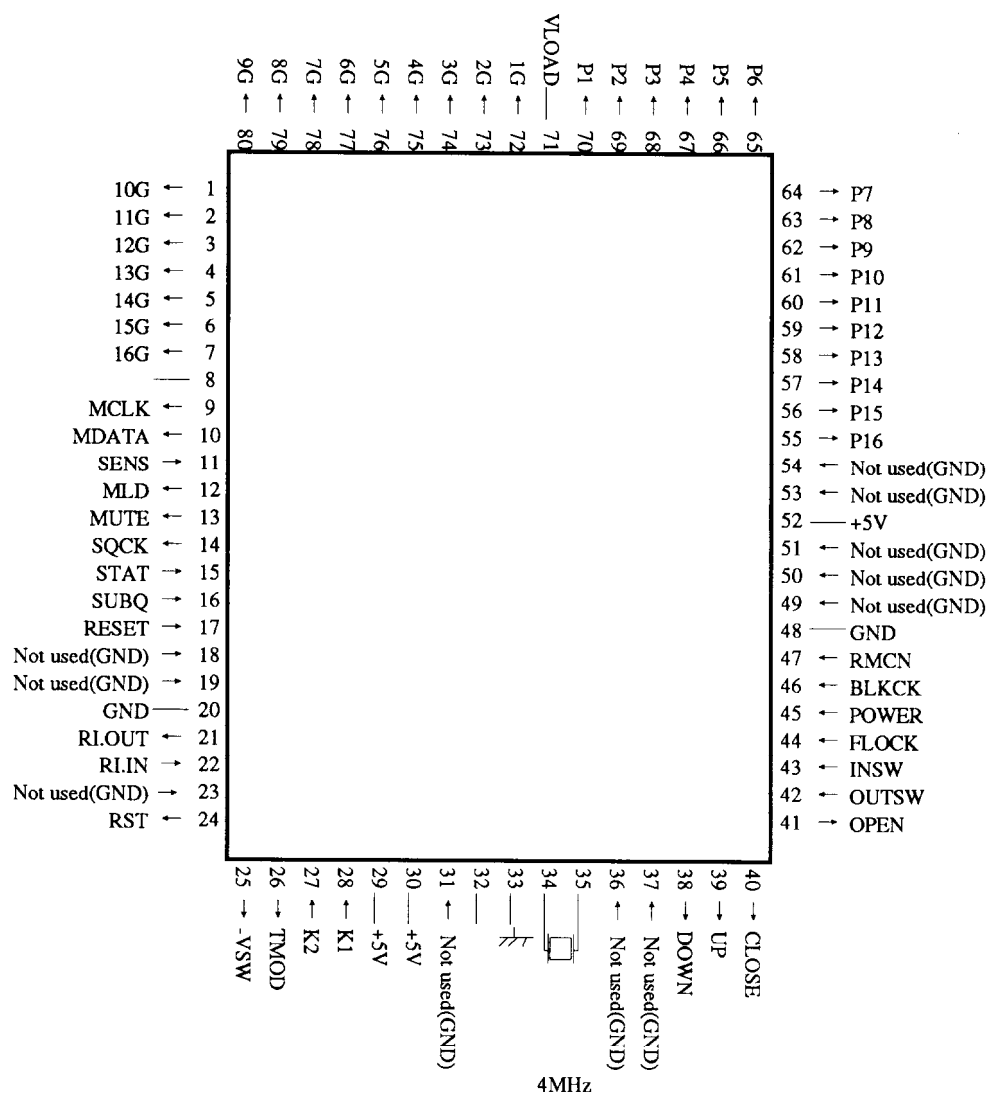


SM5843AP

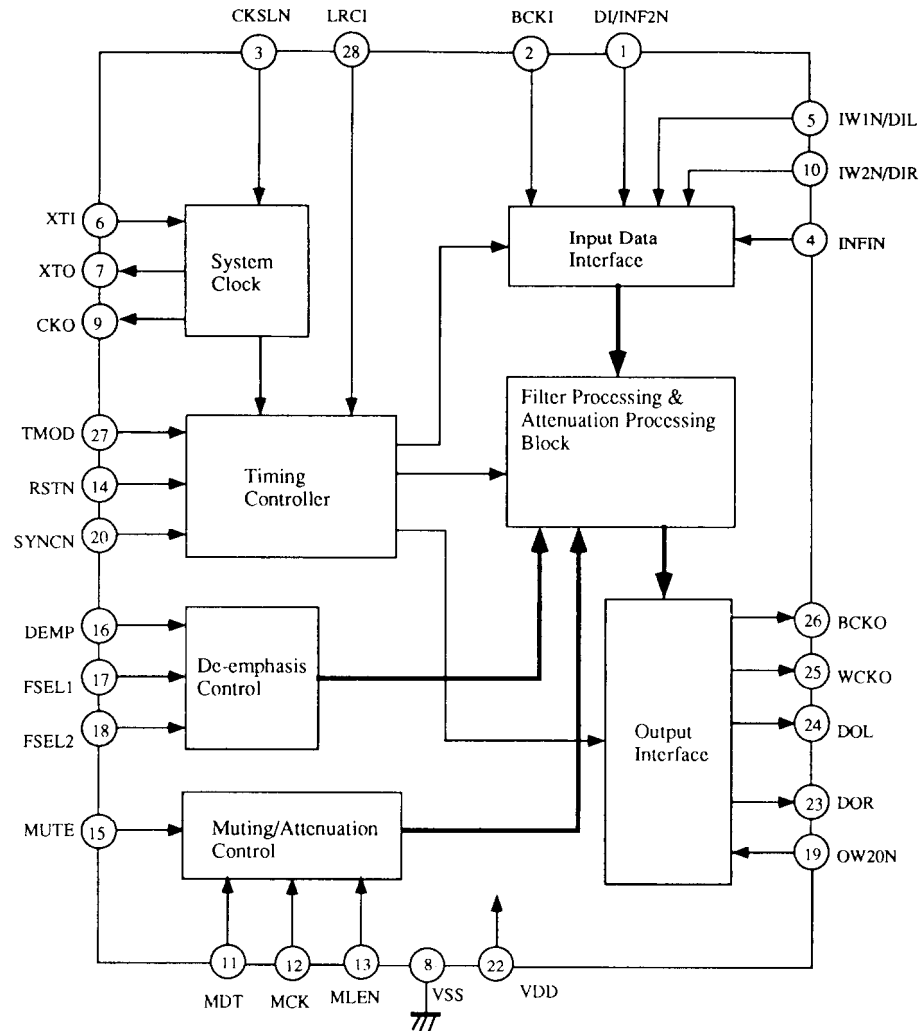

Data input	DI/INF2N	1	28	LRCI	Sample rate clock of input data
Bit clock input	BCKI	2	27	TMOD	Filter selector
Selector for resonator or input frequency	CKSLN	3	26	BCKO	Bit clock output
	INF1N	4	25	WCKO	Word clock output
	IW1N/DIL	5	24	DOL	L ch. data output
Clock input	XTI	6	23	DOR	R ch. data output
	XTO	7	22	VDD	
	VSS	8	21	NC	
Clock output	CKO	9	20	SYSCN	
	IW2N/DIR	10	19	OW2ON	
	MDT	11	18	FSEL2	
	MCK	12	17	FSEL1	
	MLEN	13	16	DEMP	DE-emphasis control ON:H
System reset Reset : L	RSTN	14	15	MUTE	Muting output Mute: H

AN8389SR

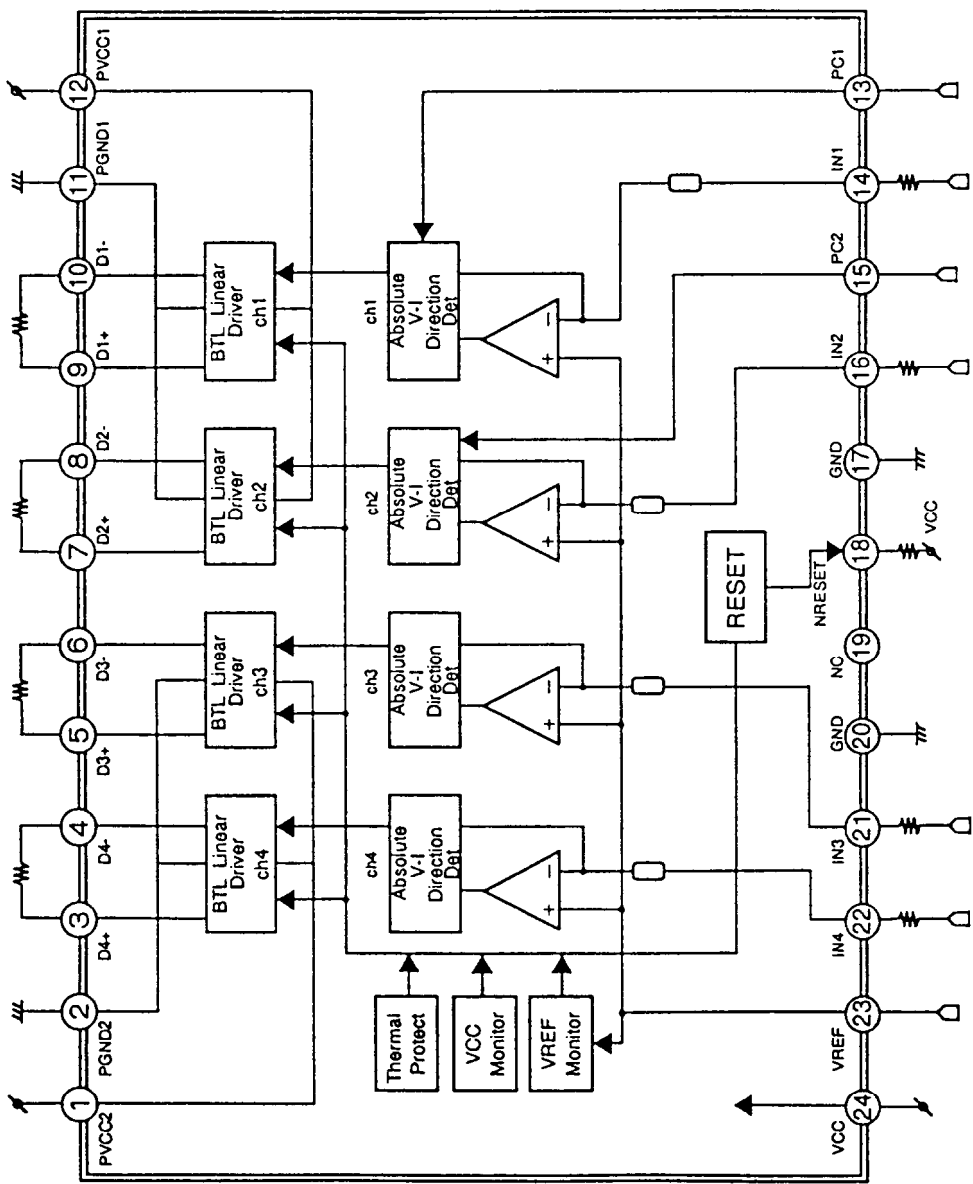


NO.	I/O	Description
1		Driver power terminal 2
2		Driver GND terminal 2
3	O	Motor driver 4 forward output terminal
4	O	Motor driver 4 reverse output terminal
5	O	Motor driver 3 forward output terminal
6	O	Motor driver 3 reverse output terminal
7	O	Motor driver 2 forward output terminal
8	O	Motor driver 2 reverse output terminal
9	O	Motor driver 1 forward output terminal
10	O	Motor driver 1 reverse output terminal
11		Driver power terminal 2
12		Driver power terminal 1
13	I	PC1(Power cux) input terminal
14	I	Motor driver 1 input terminal
15	I	PC2(Power cux) input terminal
16	I	Motor driver 2 input terminal
17		GND
18	O	Reset output terminal
19		GND
20		GND
21	I	Motor driver 3 input terminal
22	I	Motor driver 4 input terminal
23	I	VREF input terminal
24		Power terminal

MICROPROCESSOR TERMINAL DESCRIPTION

Pin No.	Symbol	I/O	Description
1~5	P94~P90/FIP6~FIP2	O	FL TUBE GRID OUTPUT
6~7	P81~P80/FIP1~FIP0		
8	VDD	I	POWER TERMINAL
9	P27/SCK0	O	COMMAND FORWARD CLOCK OUTPUT TERMINAL FOR SIGNAL PROCESS IC
10	P26/SO0/SB1	O	COMMAND DATA OUTPUT TERMINAL FOR SIGNAL PROCESS IC
11	P25/SIO/SB0	I	SENSE SIGNAL INPUT TERMINAL FROM SIGNAL PROCESS IC
12	P24/BUSY	O	COMMAND FOR SIGNAL PROCESS IC · RATCH OUTPUT TERMINAL
13	P23/STB	O	AUDIO OUTPUT MUTE SIGNAL OUTPUT TERMINAL
14	P22/SCK1	O	SUBCODE FORWARD CLOCK OUTPUT TERMINAL FOR SIGNAL PROCESS IC
15	P21/SO1	I	STATUS INPUT TERMINAL FROM SIGNAL PROCESS IC
16	P20/SI1	I	SUBCODE INPUT TERMINAL FROM SIGNAL PROCESS IC
17	RESET	I	RESET SIGNAL INPUT TERMINAL
18	P74	I	NOT USED. (CONNECTED TO GND)
19	P73	I	NOT USED. (CONNECTED TO GND)
20	AVSS	I	A/D CONVERTER POWER GND FOR KEY INPUT
21	P17/ANI7	O	SYSTEM SIGNAL OUTPUT TERMINAL
22	P16/ANI6	I	SYSTEM SIGNAL INPUT TERMINAL
23	P15/ANI5	I	NOT USED. (CONNECTED TO GND)
24	P14/ANI4	O	SIGNAL PROCESS IC RESET OUTPUT TERMINAL
25	P13/ANI3	O	FL TUBE POWER CONTROL TERMINAL
26	P12/AM12	O	T-MOD CONTROL TERMINAL
27	P11/AM11	I	KEY INPUT TERMINAL 2
28	P10/AM10	I	KEY INPUT TERMINAL 1
29	AVDD	I	A/D CONVERTER POWER TERMINAL FOR KEY INPUT
30	AVREF	I	A/D CONVERTER REFERENCE POWER TERMINAL FOR KEY INPUT
31	P04/XT1	I	NOT USED. (CONNECTED TO GND)
32	XT2		NOT USED.
33	VSS	I	POWER GND
34	X1	I	CLOCK OSCILLATE CIRCUIT INPUT TERMINAL
35	X2	O	CLOCK OSCILLATE CIRCUIT OUTPUT TERMINAL
36	P37	I	NOT USED. (CONNECTED TO GND)
37	P36/BUZ	I	NOT USED. (CONNECTED TO GND)
38	P35/PCL	O	MOTOR VOLUME CONTROL TERMINAL
39	P34/TI2	O	
40	P33/TI1	O	TRAY MOTOR CONTROL TERMINAL
41	P32/TO2	O	
42	P31/TO1	O	TRAY OPEN DETECTION TERMINAL
43	P30/TO0	O	TRAY CLOSE DETECTION TERMINAL
44	P03/INTP3/CIO	I	FOCUS LOCK SIGNAL FROM SIGNAL PROCESS IC INPUT TERMINAL
45	P02/INTP2	I	POWER DETECTION TERMINAL
46	P01/INTP1	I	SUBCODE BLOCK FROM SIGNAL PROCESS IC DETECTION SIGNAL INPUT TERMINAL
47	P00/INTP0/TIO	I	REMOTE SENSOR SIGNAL INPUT TERMINAL
48	IC	I	MICROPROCESSOR INTERNALY CONNECT TERMINAL (CONNECTED TO GND)
49	P72	I	NOT USED. (CONNECTED TO GND)
50	P71	I	NOT USED. (CONNECTED TO GND)
51	P70	I	NOT USED. (CONNECTED TO GND)
52	VDD	I	POWER TERMINAL
53	P127/FIP33	I	NOT USED. (CONNECTED TO GND)
54	P126/FIP32	I	NOT USED. (CONNECTED TO GND)
55~60	P125~P120/FIP31~FIP26	O	FL TUBE SEGMENT OUTPUT TERMINAL
61~68	P117~P110/FIP25~FIP18		
69~70	P107~P106/FIP17~FIP16		
71	VLOAD	I	NEGATIVE POWER SUPPLY TERMINAL FL TUBE
72~77	P105~P100/FIP15~FIP10	O	FL TUBE GRID OUTPUT
78~80	P97~P95/FIP9~FIP7		


IC BLOCK DIAGRAM AND DESCRIPTION

MN662720RB

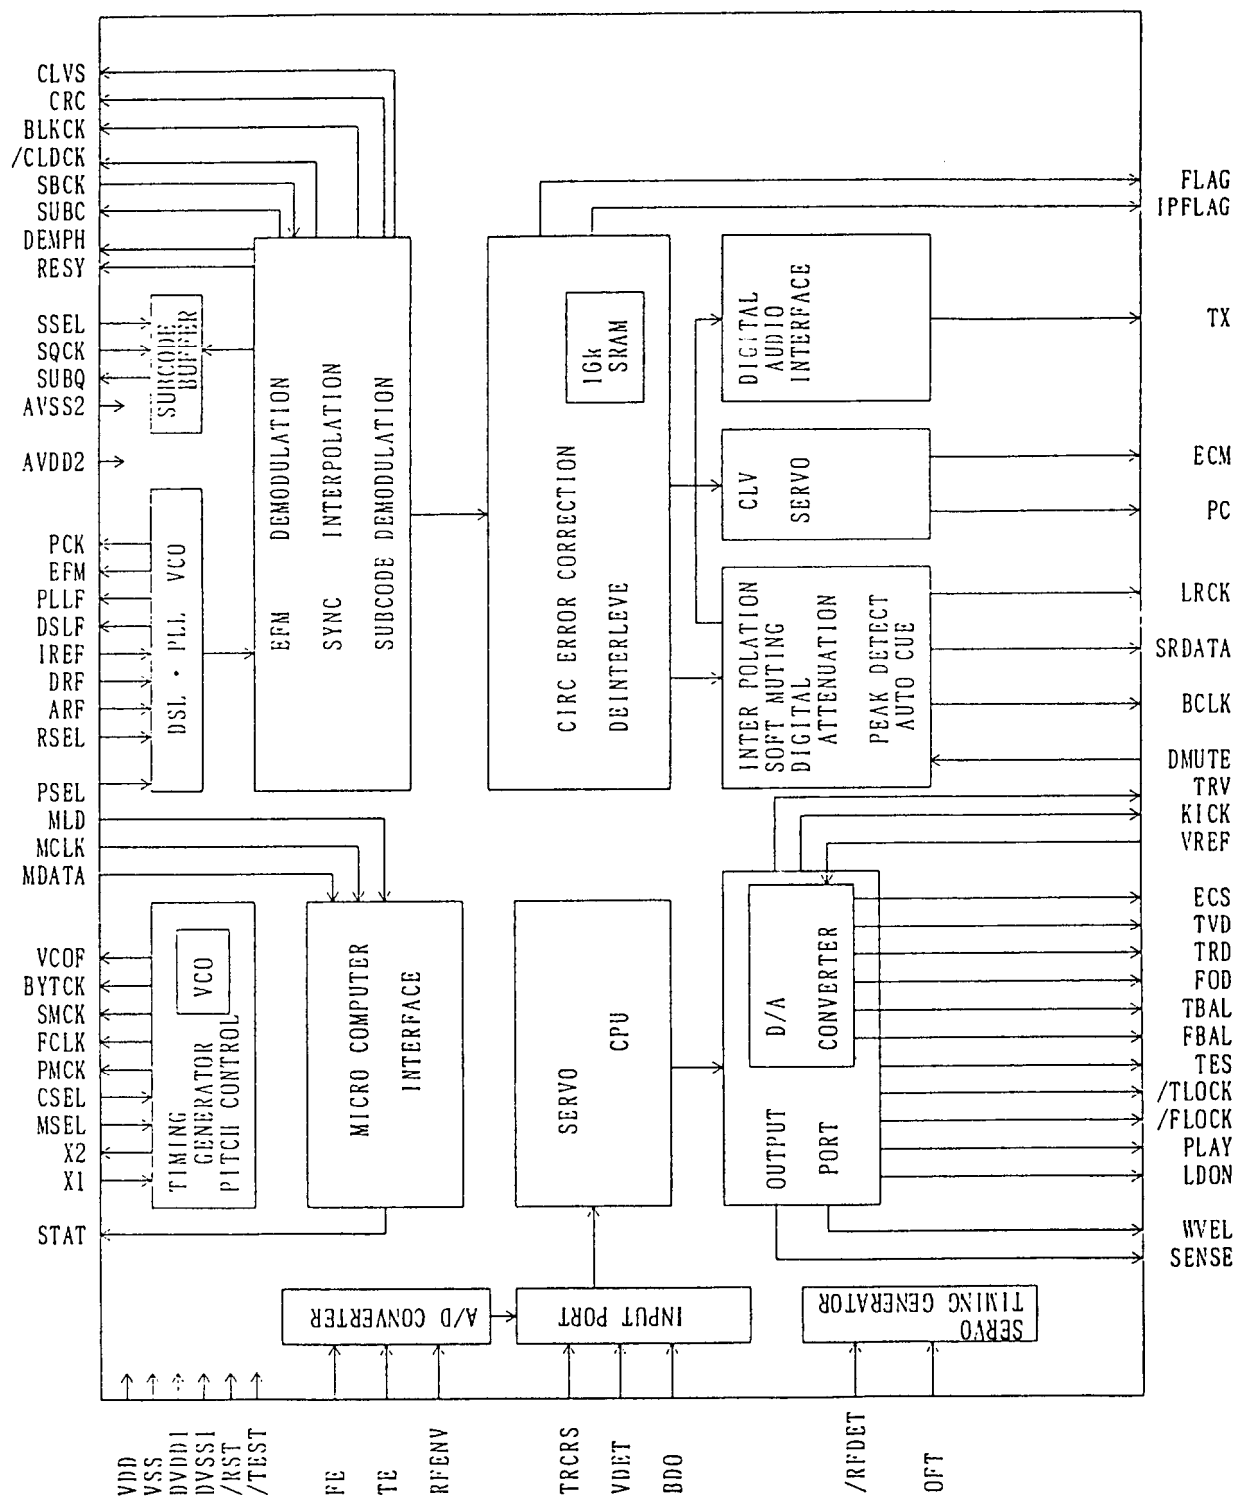

NO.		I/O	Description	NO.		I/O	Description
1	BCLK	O	Bit clock output for SRDATA	41	TES	O	Tracking error shunt signal input
2	LRCK	O	L,R Detection signal output	42	PLAY	O	Play signal output
3	SRDATA	O	Serial data output	43	WVEL	O	Hi-speed status signal output
4	DVDD1	I	Power for digital circuit	44	ARF	I	RF signal input
5	DVSS1	I	GND for digital circuit	45	IREF	I	Reference current input terminal
6	TX	O	Digital audio interface output signal	46	DRF	I	DSL bias terminal
7	MCLK	I	Microprocessor command clock signal input	47	DSLIF	I/O	DSL roop filter terminal
8	MDATA	I	Microprocessor command data input	48	PLLIF	I/O	PLL loop filter terminal
9	MLD	I	Microprocessor command load signal output	49	VCOF	I/O	VCO loop filter terminal
10	SENSE	O	Sense signal input	50	AVDD2	I	Power for analog circuit
11	/FLOCK	O	Focus servo signal	51	AVSS2	I	GND for analog circuit
12	/TLOCK	O	Tracking servo signal	52	EFM	O	EFM signal output
13	BLKCK	O	Sub code block clock signal	53	PCK	O	PLL extraction clock output
14	SQCK	I	External clock input for sub code Q resistor	54	PDO	O	Phase comparator signals output of EFM signal and PCK signal
15	SUBQ	O	Sub code Q code output	55	SUBC	O	Sub code serial output data output
16	DMUTE	I	Muting input	56	SBCK	I	Sub code serial output clock output
17	STAT	O	Status signal	57	VSS	I	GND for oscillation circuit
18	/RST	I	Reset input	58	X1	I	Crystal oscillation circuit input terminal
19	SMCK	O	MSEL=H 8.4672MHz clock signal output MSEL=L 4.2336MHz clock signal output	59	X2	O	Crystal oscillation circuit output terminal
20	PMCK	O	88.2kHz clock signal output	60	VDD	I	Power for oscillation circuit
21	TRV	O	Traverse enforcement output	61	BYTCK	O	Bite clock output
22	TVD	O	Traverse drive output	62	/CLDCK	O	Sub code frame clock signal output
23	PC	O	Spindle motor ON signal	63	FCLK	O	Crystal frame clock output
24	ECM	O	Spindle motor drive signal (force mode output)	64	IPFLAG	O	Interpolation flag output
25	ECS	O	Spindle motor drive signal (servo error signal output)	65	FLAG	O	Flag output
26	KICK	O	Kick pulse output	66	CLVS	O	Spindle servo phase synchronize signal output
27	TRD	O	Tracking drive output	67	CRC	O	Subcode CRC check output
28	FOD	O	Focus drive output	68	DEMPH	O	Deemphasise detection signal output
29	VREF	I	Reference voltage for DA output	69	RESY	O	SSEL = L FLAG6 output SSEL = H RESY output
30	FBAL	O	Focus balance adjustment output	70	NC1	NC	No connection terminal
31	TBAL	O	Tracking balance adjustment output	71	/TEST	I	Test terminal
32	FE	I	Focus error signal input (analog input)	72	AVDD1	I	Power for digital circuit
33	TE	I	Tracking error signal input (analog input)	73	NC2	NC	No connection terminal
34	RFENV	I	RF envelope signal input	74	AVSS1	I	GND for digital circuit
35	VDET	I	Vibration detection signal input	75	NC3	NC	No connection terminal
36	OFT	I	Off track signal input	76	RSEL	I	RF signal pole specified terminal
37	TRCRS	I	Track cross signal input	77	CSEL	I	Crystal oscillation frequency specified terminal
38	/RFDET	I	RF detection signal input	78	PSEL	I	Test terminal
39	BDO	I	Dropout signal input	79	MSEL	I	SMCK terminal
40	LDON	O	Laser ON signal output	80	SSEL	I	SUBQ terminal

AN8806SB

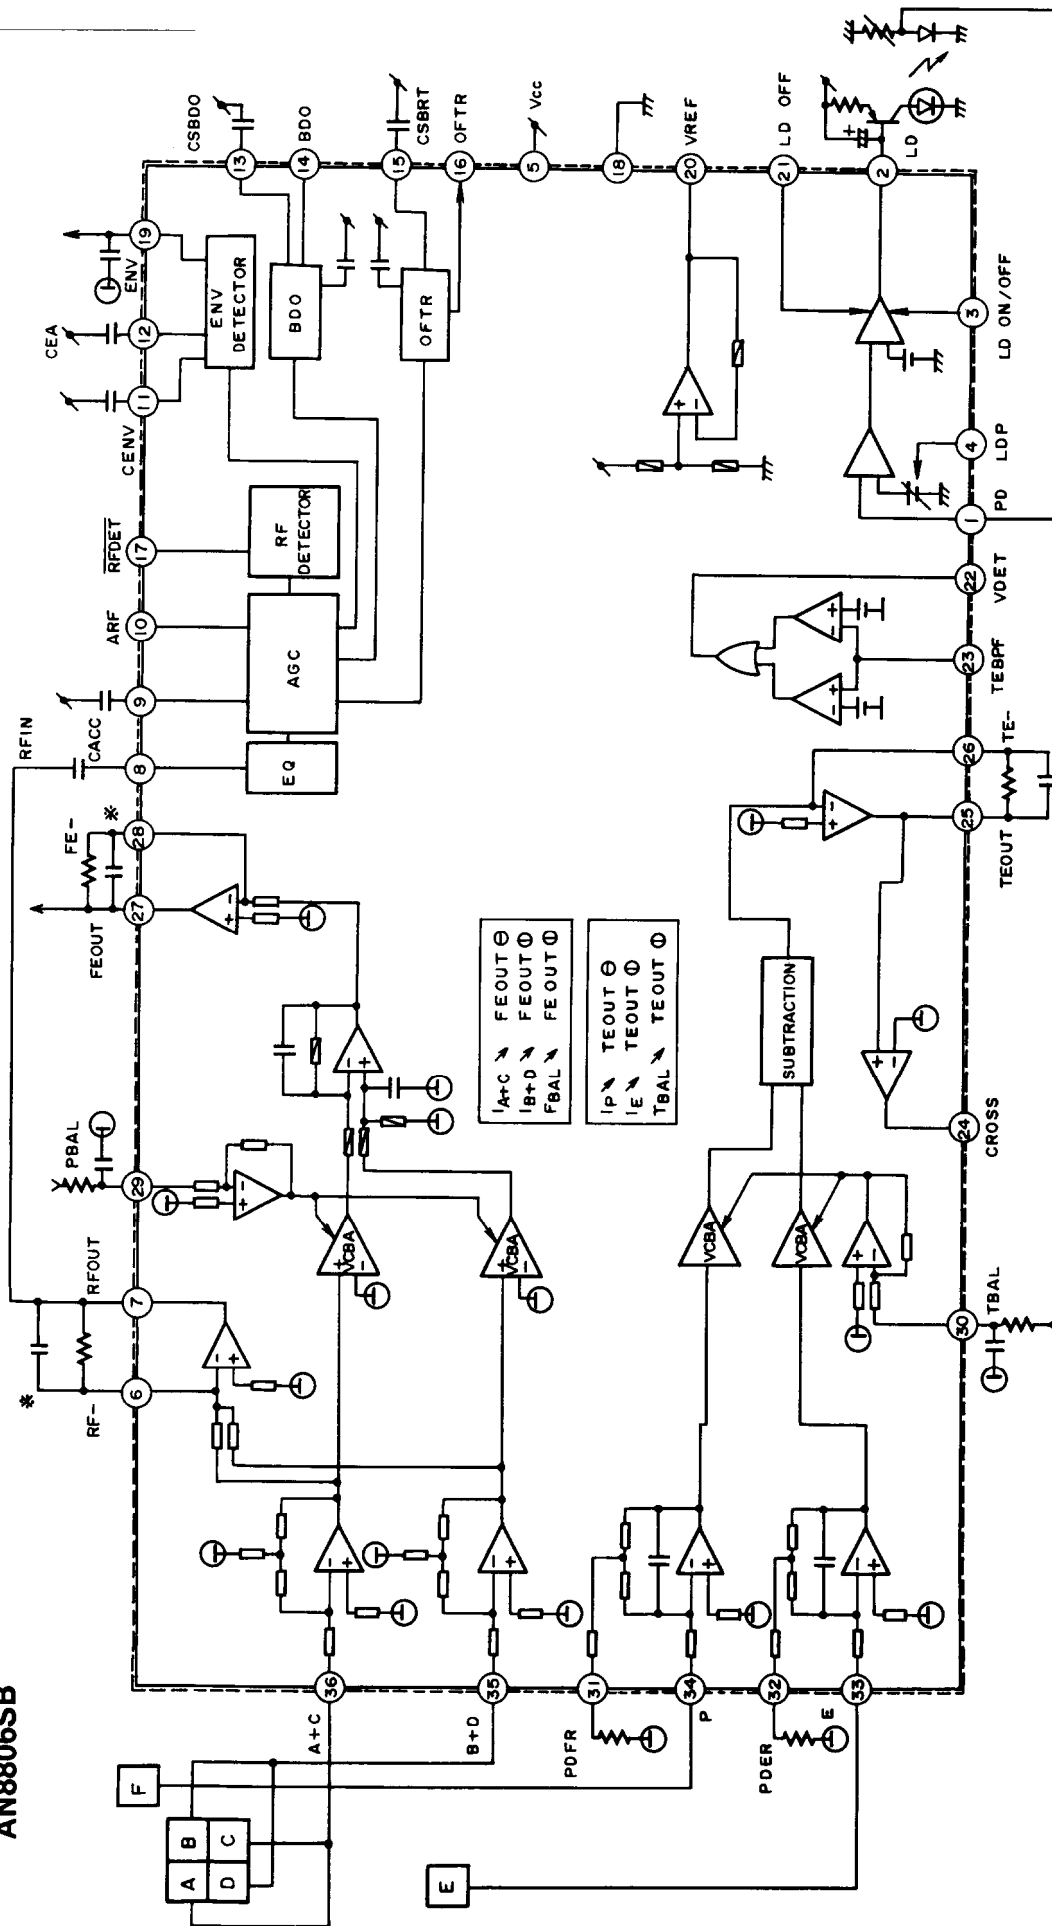


NO.	I/O	Description
1	I	APC Amp input terminal
2	O	APC Amp output terminal
3	O	APC ON/OFF control terminal
4		APC reference terminal
5		Power terminal
6	I	RF Amp reverse input terminal
7	O	RF Amp output terminal
8	I	AGC input terminal
9		AGC loop filter terminal
10	O	AGC output terminal
11		RF detector terminal
12		HPF-Amp terminal
13		RF dark side envelope detector terminal
14	O	BDO output terminal
15		RF light side envelope detector terminal
16	O	OFTR output terminal
17	O	RFDET output terminal
18		GND
19	O	3TENV output terminal
20	O	VREF output terminal
21	O	APC OFF control terminal
22	O	VDET output terminal
23	I	VDET input terminal
24	O	CROSS output terminal
25	O	TE.Amp output terminal
26	I	TE.Amp reverse input terminal
27	O	FE.Amp output terminal
28	I	FE.Amp reverse input terminal
29	O	F.BAL control terminal
30	O	T.BAL control terminal
31		I-V Amp convert resistor adjustment terminal
32		I-V Amp convert resistor adjustment terminal
33	I	I-V Amp input terminal
34	I	I-V Amp input terminal
35	I	I-V Amp input terminal
36	I	I-V Amp input terminal

CAUTION ON REPLACEMENT OF PICKUP

The laser diode in the optical pickup block is so sensitive to static electricity, surge current and etc. that the components are liable to be broken down or its reliability remarkably deteriorated.

During repair, carefully take the following precautions.

1. When replacing the optical pickup, first short the LD terminals and remove the connector. Also, when attaching the new optical pickup, after attaching the connector, unsolder the LD terminals.
2. Do not touch the optical pickup object lens with the hands.

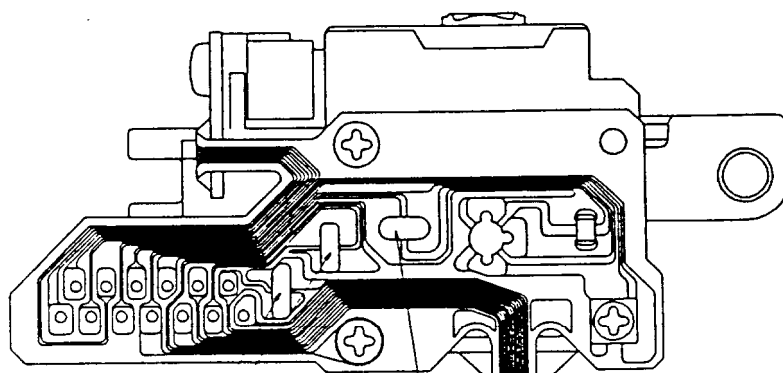

Short pattern for LD protection.


ADJUSTMENT PROCEDURE

Instrument required

Dual trace oscilloscope, Frequency counter, AF oscillator, Test disc (SONY YEDS-18), AC voltmeter, and Socket P4 (Part no. 25050138)

1. Slide Balance Adjustment

1. Connect the audio oscillator to P154 SLD and the oscilloscope to P154 SLD and VS as shown bellow.
 2. Set the output of oscillator to the square wave, 5Hz, 2Vp-p.
 3. Turn the switch S151 to OPEN.
 4. Turn the power switch to ON.
 5. Confirm that the optical pickup does not move. (If it moves, control it by hand.)
 6. Adjust the semi-fixed resistor R139 so that the waveforms of channels 1 and 2 become the same phase.
- After adjustment, remove the audio oscillator and oscilloscope.

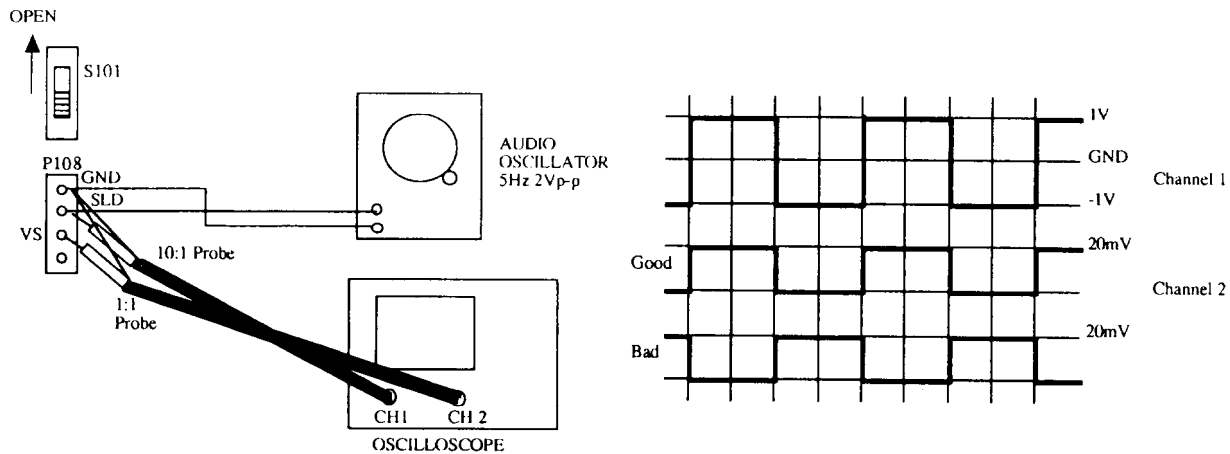

2. Slide Offset Adjustment

1. Connect the oscilloscope to P154 SLD.
2. Turn S151 to SHORT.
3. Adjust the semi-fixed resistor R175 so that the waveform on the oscilloscope becomes 0V.

3. confirmation of Jitter

1. Connect the jitter meter to P155, and confirm the jitter value is less than 14nSec.

4. Auto Adjustment


1. If you push the [UP] button and [DISPLAY] button together when the power switch turns ON,
2. Insert the disc and closed by [OPEN/CLOSE] button, the disc will read in and autoadjustmen will start. you can enter to the Test mode.

When the autoadjustmen finished, disc's information will displayed.

At times error message (Er Fg, Er Fe) will displayed, but it is not bud condition.

Push the [OPEN/CLOSE] button and [DIGITAL OUT] button together When the power ON no disc condition, you will cancel the test mode.

BLOCK DIAGRAM

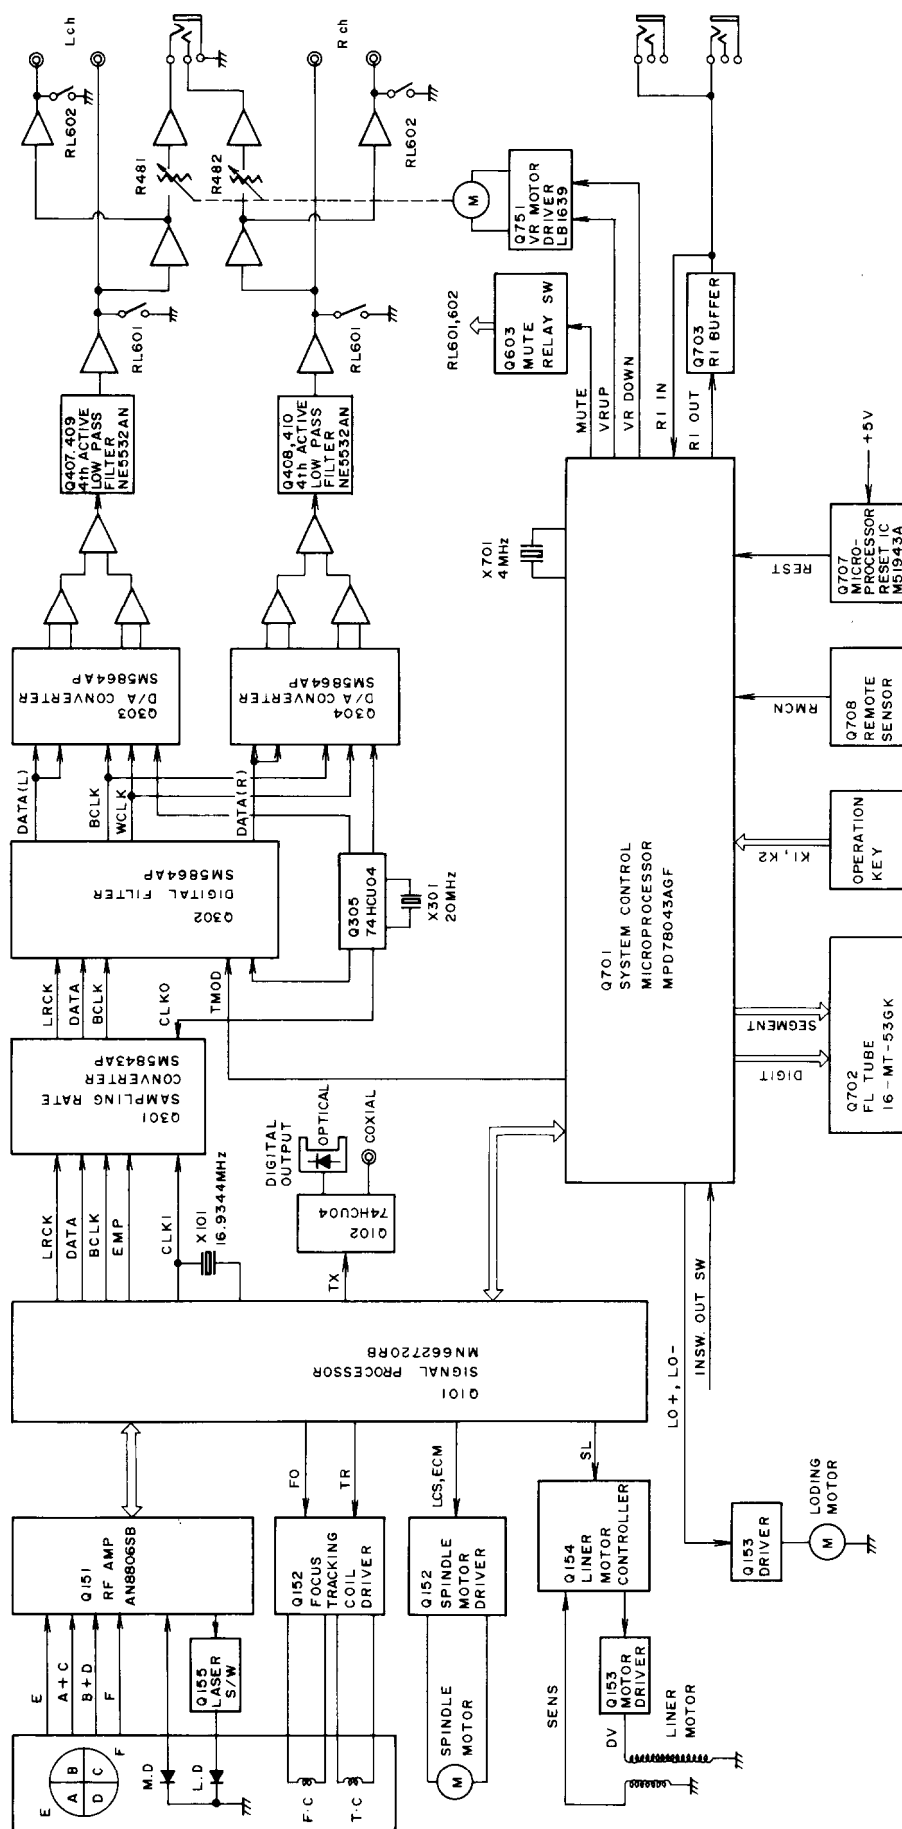

PRINTED CIRCUIT BOARD-PARTS LIST

MAIN CIRCUIT PC BOARD (NAAR-5645)

CIRCUIT NO. PART NO. DESCRIPTION

	ICS	
Q101	22240925	MN662720RB
Q102	222755	TC74HCU04P
Q301	22240913R3	SM5844AF
Q302	22240680-1	SM5843AP
Q303,Q304	22240963	SM5864AP
Q305	222755	TC74HCU04P
Q401-Q406	22240965	OPA2604AP
Q407-Q410	22240656	NE5532AN
Q411,Q412	22240191	NJM4565D-D
Q751	22240322	LB1639
Q910,Q913,Q914	222780125	78M12HF
Q911,Q912	222780055	78M05HF
Q915,Q916	222780053	78L05

TRANSISTORS

Q306,Q601	2213570 or 221281 or 2214930	RN1207 or DTC114YS or UN4214
Q602	2211945	2SK246-GR
Q603	2211706 or 2211705	2SD655-F or 2SD655-E
Q752,Q753	2213570 or 221281 or 2214930	RN1207 or DTC114YS or UN4214
Q901,Q902,Q905	2211945	2SK246-GR
Q903	2213284 or 2211183 or 2211255	2SC1740S-R or 2SC1740-R or 2SC1815-GR
Q904,Q906	2211455	2SA1015-GR
Q907	2201285 or 2201286	2SD882-Q or 2SD882-P
Q908	2201275 or 2201276	2SB772-Q or 2SB772-P
Q909	2202706	2SD2394-F

OPTICAL MODULE

Q103	24120038	GP1F32T
D601,D602	223222 or 223205 or 223163	WG713A or 1SS270A or 1SS133
D913,D914	224470512	MTZJ5.1B, Zener
D915	224470823	MTZJ8.2C, Zener

CRYSTAL,HOLDERS

X101	3010159	AT-38-169
X301	3010262	XTL-20.00M
X101A	27190751	HOLDER
X301A	27190751	HOLDER

COIL,RELAY

L101	232136	NSRF-2046
RL601,RL602	25065469	NRL-2P1A-DC12-078

CAPACITORS

C433-C436	393341027	CE04W16V, 1000M, VX C
C939,C940,C947	393342227	CE04W16V, 2200M, VX C
C950,C984,C996	393342227	CE04W16V, 2200M, VX C
C999	393342227	CE04W16V, 2200M, VX C

RESISTORS

R912	442723304F	RS2WBJ, 33, METAL O R
R913	443622704	RS1WBJ, 27, METAL O R

CIRCUIT NO.

P153B
P701B
P905A
P907A
P907B

PART NO.

SOCKETS
25050970
25050967
2009990400
2009990401
2009990401

DESCRIPTION

NSCT-30P757, SOCKET
NSCT-27P754, SOCKET
NSAS-16P0537, SOCKET AS
NSAS-6P0538, SOCKET AS
NSAS-6P0538, SOCKET AS

TERMINALS

P101	25045237	NPJ-1PDOR111, PIN JACK
P401	25045429	NPJ-2PDBL254, PIN JACK
P402	25045422	NPJ-2PDBL247, PIN JACK

WIRE HOLDERS

P405A,P405B	25051107	NSCT-3P894, WIRE HOLDER
P406A,P406B	25051107	NSCT-3P894, WIRE HOLDER
P407A,P407B	25051107	NSCT-3P894, WIRE HOLDER

PLUGS

P403	25055153	NPLG-9P137, PLUG
P905	25055171	NPLG-8P155, PLUG
P906A	25055143	NPLG-13P127, PLUG

OTHERS

P404	2065525160UL	CRIMP AS
P702	25050267	NSCT-3P95, WIRE TRAP
P751	25045330	NPJ-2PDBL184, ST JACK
E102	25065425	SCREW TRMM3
E103,E104	27141059	END PLATE

POWER SUPPLY CIRCUIT PC BOARD (NAPS-5646)

CIRCUIT NO. PART NO. DESCRIPTION

	DIODES	
D901	22380048	RBA-402
D902-D912	22380035 or 22380032	GP104003E or 1SR139-100

CAPACITORS

C907,C908	3504261	CE92W50V, 10000M, ELECT C
C912,C919,C920	393342227	CE04W16V, 2200M, VX C

PLUGS

P903	25055135	NPLG-5P119, PLUG
P904	25055136	NPLG-6P120, PLUG

SWITCH PC BOARD (NASW-5651)

CIRCUIT NO. PART NO. DESCRIPTION

	SWITCH	
S901	25035636	NPS-111-L590P, PUSH SWITCH

MECHA DRIVE CIRCUIT PC BOARD (NADIS-5650)

CIRCUIT NO. PART NO. DESCRIPTION

	ICS	
Q151	22240924	AN8806SB
Q152	22240927	AN8389SR
Q153	22240620	LA6520
Q154	222090	S2FR04
Q953	222780055	78M05HF

TRANSISTORS

Q155	2211504 or 2211503	2SA950-Y or 2SA950-O
Q951	2211504 or 2211503	2SA950-Y or 2SA950-O
Q952	2211164	2SC2120-Y
Q954	2211504 or 2211503	2SA950-Y or 2SA950-O
Q955,Q956	2211455	2SA1015-GR
Q957,Q958	2211164	2SC2120-Y
Q959	2211454	2SA1015-Y
Q960	2202705	2SD2394-E

CIRCUIT NO.	PART NO.	DESCRIPTION
	DIODES	
D151	223222 or 223205 or 223163	WG713A or 1SS270A or 1SS133
D951,D952	224471103	MTZJ11C, Zener
D953	224473004	MTZJ30D, Zener
D954,D955	22380035	GP104003E
	22380032	1SR139-100
D956	224470753	MTZJ7.5C, Zener
	223205	1SS270A
	223163	1SS133
	CRYSTAL, COIL	
L151	233454K100T	NCH-1452 100K, CHOKE COIL
X701	3010229T	EFOEC4004A4, CERA LOCK
	RESISTORS	
R174	5210002	N06HR 150BDM, TRIMMER
R175	5210064	N06HR 10KBD, TRIMMER
R482	5142020	N16RGM 20KB30F, VARIABLE
	SWITCH	
S151	25065364	NSS-12138, SLIDE SWITCH
	SOCKETS	
P151	25050958	NSCT-18P745, SOCKET
P153A	25050970	NSCT-30P757, SOCKET
P906B	2001292625	NSAS-26P0546, SOCKET AS
	PLUGS	
P152	25055149	NPLG-5P133, PLUG
P154	25055045	NPLG-4P33, PLUG
P155	25055042	NPLG-3P32, PLUGS
	OTHERS	
JL452A	25051107	NSCT-3P894, WIRE HOLDER
Q702B	27190778A	HOLDER(DIS)
J1	2061513120	CRIMP AS

DISPLAY CIRCUIT PC BOARD (NADIS-5649-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
	ICS	
Q701	22241028	μPD78043AGF-051
Q707	22240018	M51943A
Q703	2212600	DTA124ES
Q704-Q706	2211164	2SC2120-Y
Q709	221282	DTC144ES
	FL TUBE	
Q702	212149	16-MT-53GK
	DIODES	
D702,D704	223222 or 223205 or 223163	WG713A or 1SS270A or 1SS133
D701	224470623	MTZJ6.2C, Zener
D703	224470562	MTZJ5.6B, Zener
D705	223222 or 223205 or 223163	WG713A or 1SS270A or 1SS133
D706	223222	WG713A
	RESISTORS	
R722	49163104416	RM1/10U 100K×16, R NET
R723	49163104416	RM1/10U 100K×16, R NET
	SWITCHES	
S701-S711	25035652	NPS-111-S604, NPS-111-S624, PUSH SWITCH

CIRCUIT NO.	PART NO.	DESCRIPTION
	OTHERS	
P701A	25050933	NSCT-27P720, SOCKET
P703A	25050280	NSCT-3P108, WIRE TRAP
P704A	25051107	NSCT-3P894, WIRE HOLDER

HEADPHONE AMPLIFIER CIRCUIT PC BOARD (NAAF-5647)

CIRCUIT NO.	PART NO.	DESCRIPTION
	IC	
Q451	22240369	M5218AP
	RESISTOR	
R481	5142020	N16RGM 20KB30F, VARIABLE
	SOCKET	
P403A	2009990399A	NSAS-18P0536
	WIRE HOLDER	
P702A	25051107	NSCT-3P894

HEADPHONE JACK PC BOARD (NAAF-5648)

CIRCUIT NO.	PART NO.	DESCRIPTION
	HP JACK	
P451	25045221	HLJ0540-01-410, HP JACK
	WIRE HOLDER	
JL452B	25051107	NSCT-3P894

REMOTE SENSOR PC BOARD (NAETC-5657)

CIRCUIT NO.	PART NO.	DESCRIPTION
	REMOTE SENSOR	
Q708	241302	PIC-12043TH2
	WIRE HOLDER	
P703B	25051107	NSCT-3P894

INDICATOR PC BOARD (NADIS-5652)


CIRCUIT NO.	PART NO.	DESCRIPTION
	DIODE	
D751	225324D or 225324C	SEL6910A-D, LED or SEL6910A-C, LED
	WIRE HOLDER	
P704B	25051107	NSCT-3P894

MECHA PC BOARD (NAETC-5653-1)

CIRCUIT NO.	PART NO.	DESCRIPTION
	SOCKETS	
P1	25051583	NSCT-13P1370
P2	25051651	NSCT-18P1438
P3A	25050868	NSCT-4P663

NOTE: THE COMPONENTS IDENTIFIED BY
MARK ARE CRITICAL FOR RISK OF
FIRE AND ELECTRIC SHOCK. REPLACE
ONLY WITH PART NUMBER

PACKING VIEW

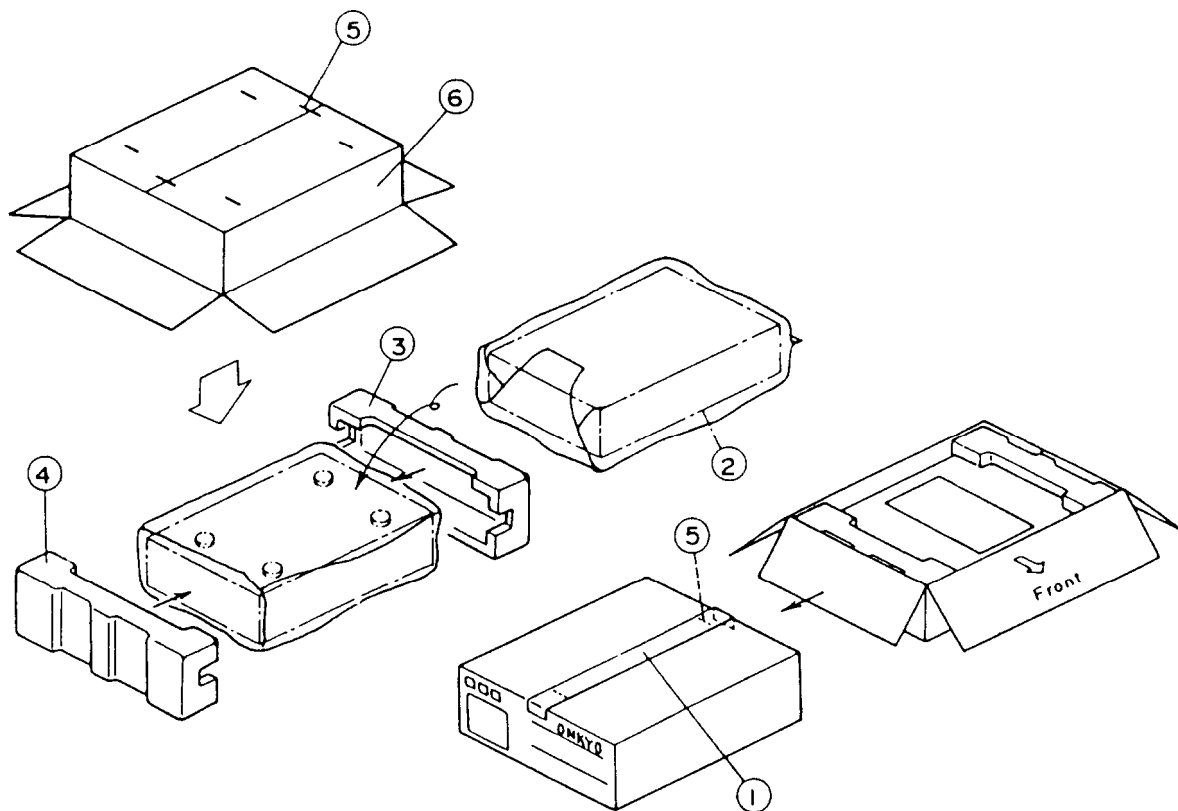

REF NO.	PART NO.	DESCRIPTION	ACCESSORY BAG AS
1	29110071	PP TAPE	2010238 CORD AS
2	29100105	POLY BAG	2010200 3.5MINI PLUG, CORD AS
3	29091715	PAD (L)	24140308 RC-308C, REMOTE CONTROLLER
4	29091716	PAD (R)	3010054 UM-3, BATTERY
5	282301	STAPLE	29355244 INSTRUCTION SHEET (L)
6	29052961	CARTON <S>	29342264 INSTRUCTION MANUAL (E)
	29052960	CARTON 	29342266 INSTRUCTION MANUAL (U6) <P (without E)>
	29052962	CARTON <G>	29342265 INSTRUCTION MANUAL (U3) <C,W,T>
	29361937	LABEL (L)	29342267 INSTRUCTION MANUAL (T) <W>
	29360687	LABEL (CLASS1) <P,W>	25055040 CV-K-2, CV PLUG <W>
	29361935	LABEL (UPC) <D>	29100097-1AY 320 X 250, POLY BAG
	29361947	LABEL (UPC) <GN>	29365019A WARRANTY CARD <N>
	29360404	SHEET	29358002J SERVICE STATION LIST <N>

<S> : Silver model only
 : Black model only
 <G> : Golden model only
 <D> : 120V model only
 <P> : 230V model only
 <W> : Worldwide model only
 <N> : American model only
 <C> : Canadian model only
 <E> : British model only
 <A> : Australian model only
 <T> : Taiwanese model only
 <GN> : American golden model only


ADJUSTMENT PROCEDURE

Instrument required

Oscilloscope, Test disc (SONY YEDS-18),Jitter meter and AC voltmeter.

1. Slide Balance Adjustment

- 1. Connect the audio oscillator between the P155 sensor output and GND as shown bellow. (Ch.1)
 - 2. Turn on the switch of set. (Wait for a moment still focus serch finished.)
 - 3. Adjust the semi-fixed resistor R174 (pushing the S101) so that the waveform on the oscilloscope becomes 0V.
- (After checking the pickup go back to innermost positon.)

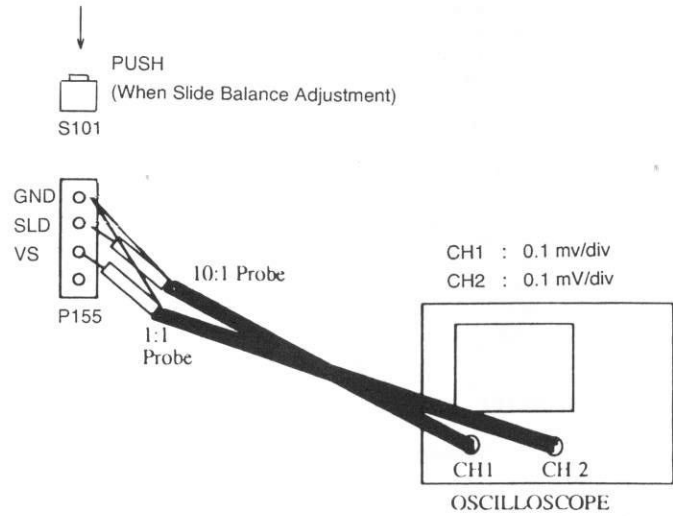

2. Slide Offset Adjustment

- 1. Connect the audio oscillator between P155 SLD output and GND.
 - 2. Turn on the switch of set. (Wait for a moment still focus serch finished.)
 - 3. Adjust the semi-fixed resistor R175 so that the waveform on the oscilloscope becomes 0V.
- (Check the GND positon of audio oscillator.)


3. confirmation of Jitter

- 1. Connect the jitter meter to P155, and confirm the jitter value is less than 14nSec.


4. Auto Adjustment

- 1. If you push the [UP] button and [DISPLAY] button together when the power switch turns ON,
 - 2. Insert the disc and closed by [OPEN/CLOSE] button, the disc will read in and autoadjustmen will start.
- you can enter to the Test mode.
- When the autoadjustmen finished, disc's information will displayed.
- At times error message (Er Fg, Er Fe) will displayed, but it is not bud condition.
- Push the [OPEN/CLOSE] button and [DIGITAL OUT] button togther When the power ON no disc condition, you will cancel the test mode.

BLOCK DIAGRAM

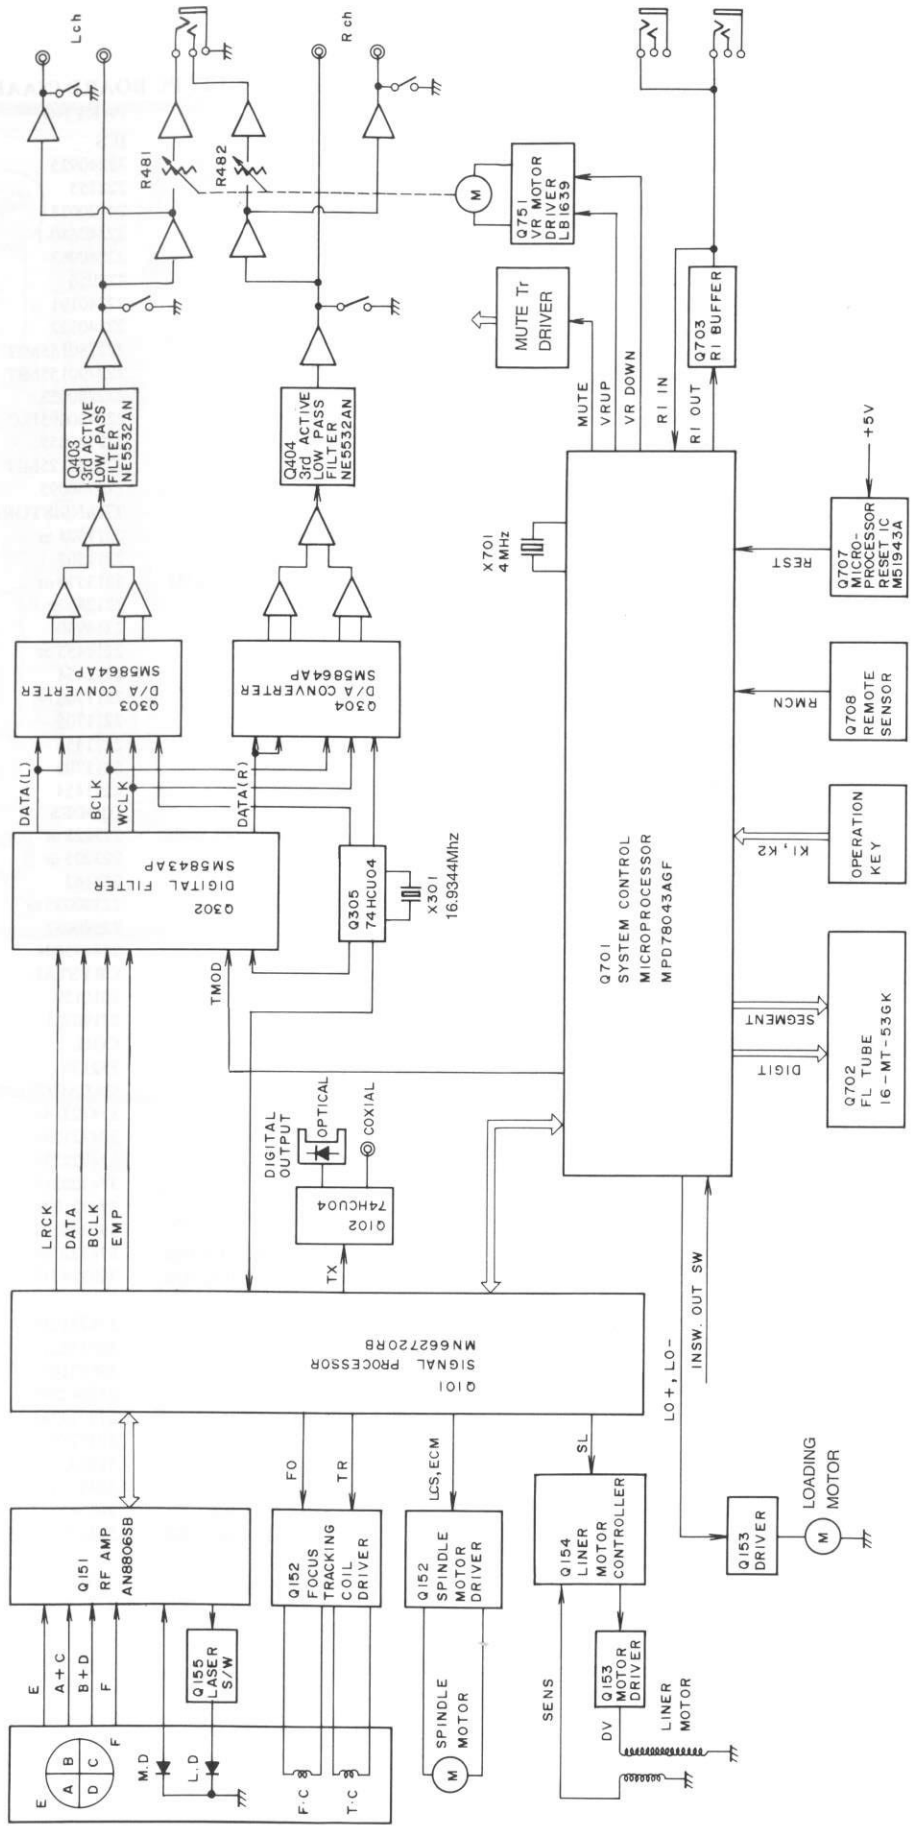


MECHANISM-EXPLODED VIEW

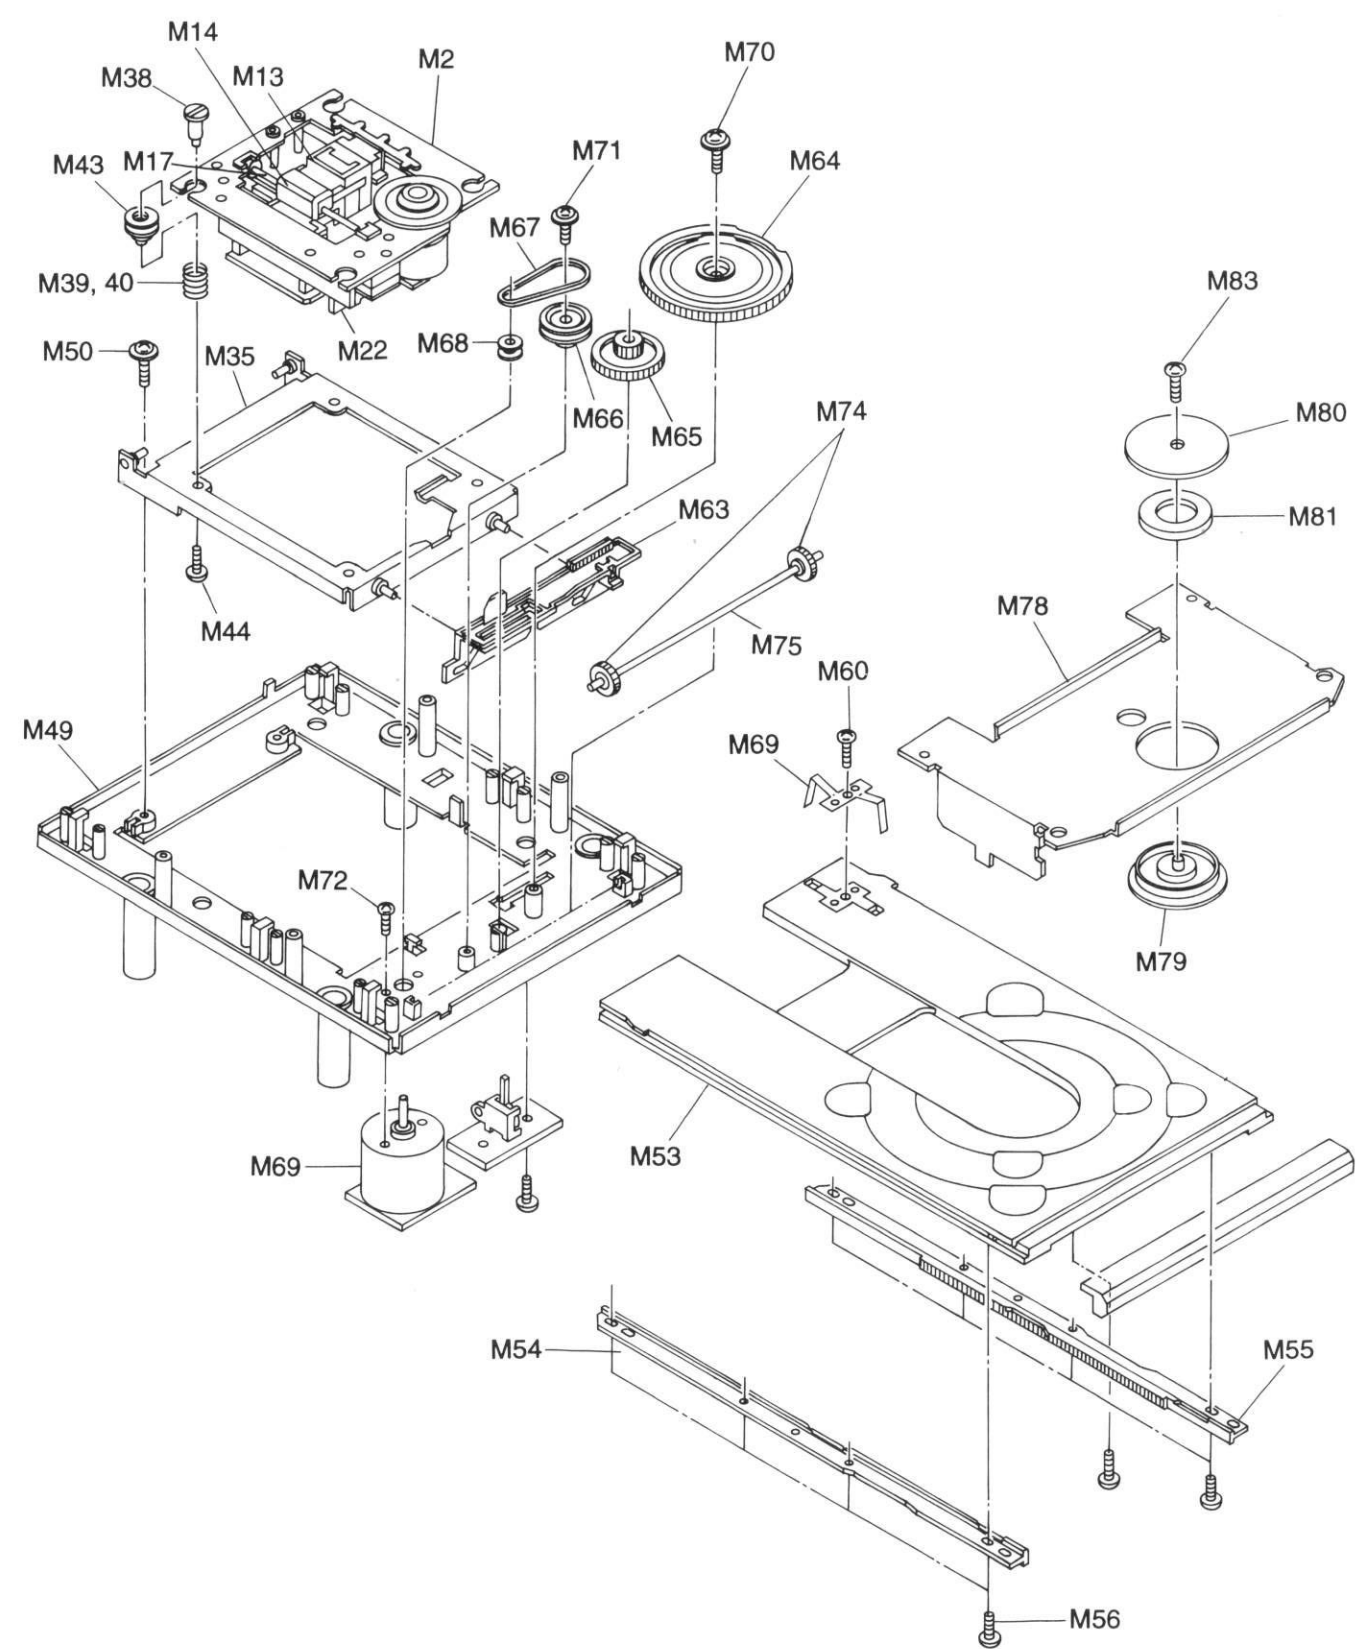

MECHANISM-PARTS LIST

REF NO.	PART NO.	DESCRIPTION
M2	24802023	CHASSIS (PU)AS
M13	24804019	PICK UP
M14	24840100	BLOCK (RET)
M17	24828013	SHAFT (PU)
M18	27270322	SPACER
M19	27270323	SPACER
M21	24804020	LINEAR MOTOR
M35	24802020	CHASSIS (SUB)AS
M38	24826007A-1	HOLDER (FLT)
M39	27180462	SPRING (FRG)
M40	27180461	SPRING (FLS)
M43	27301466A	CUSHION
M44	82142004	2P+4F(BC), SCREW
M49	24802022A	CHASSIS (MAIN)
M50	831430088	3TTW+8B(BC), SCREW
M53	24840101	DISC TRAY
M54	24810032	RACK (L)
M55	24810033	RACK (R)
M56	834426068	2.6TTS+6B(BC), SCREW
M59	24820031	PLATE (E)
M60	838430088	3TTB+8B(BC), SCREW
M63	24810034A	CAM PLATE
M64	24810035A	GEAR (MAIN)
M65	24810036	GEAR
M66	24810037	PULLEY
M67	24816012	BELT
M68	27300859A	PULLEY MO
M69	24502234A	MDH2B60, MOTOR
M70	831430088	3TTW+8B(BC), SCREW
M71	831426060	2.6TTW+6P(BC), SCREW
M72	82113003	3P+3F, SCREW
M74	24810038	GEAR (SYN)
M75	24828015	SHAFT (SYN)
M78	24840103	PLATE (CH)
M79	24824005	CAP (CH)
M80	27301344	YOKE (CH)
M81	28181019A	MAGNET
M83	833426050	2.6TTP+5P(BC), SCREW
M85	838430088	3TTB+8B(BC), SCREW
M86	2061112060UL	CRIMP AS
M92	1H302553-1	NAETC-5653-1
M93	2049041022	NCFC9-041022, FFC
M94	2042131022	NCFC2-131022, FFC
M95	834426068	2.6TTS+6B, (BC), SCREW

SCHEMATIC DIAGRAM

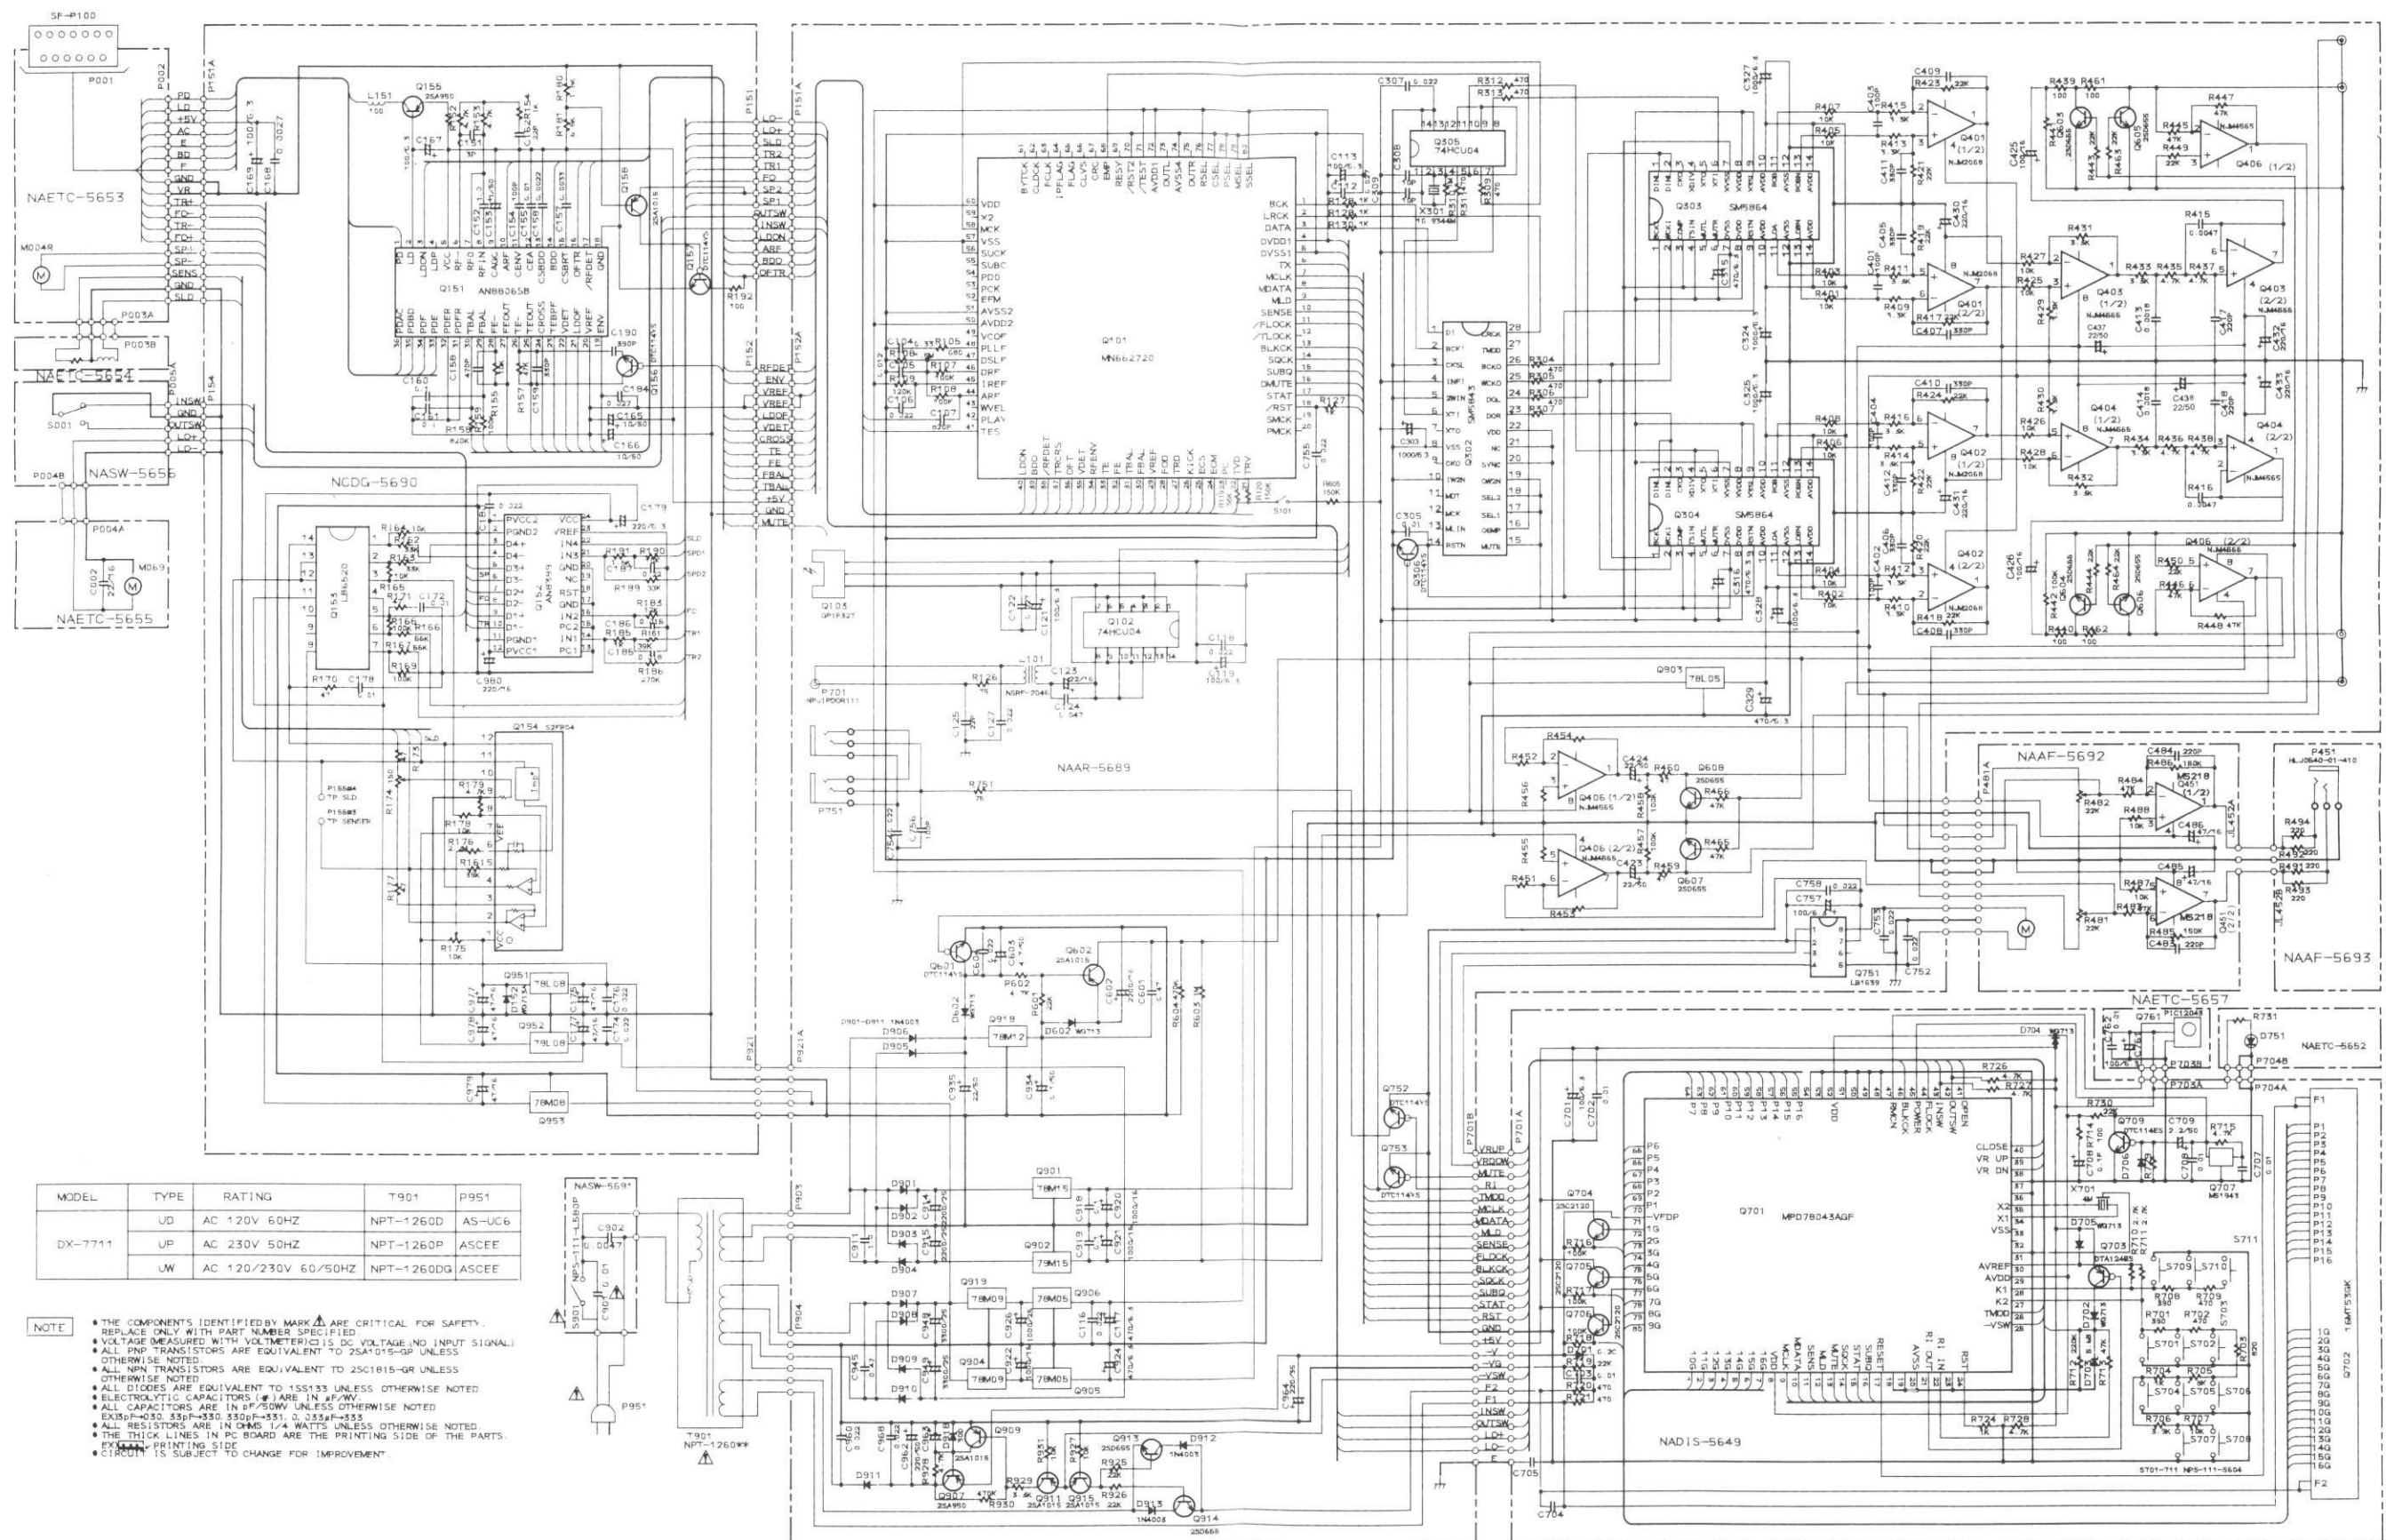


CAUTION ON REPLACEMENT OF PICKUP

The laser diode in the optical pickup block is so sensitive to static electricity, surge current and etc. that the components are liable to be broken down or its reliability remarkably deteriorated.


During repair, carefully take the following precautions.

1. When replacing the optical pickup, first short the LD terminals and remove the connector. Also, when attaching the new optical pickup, after attaching the connector, unsolder the LD terminals.
2. Do not touch the optical pickup object lens with the hands.

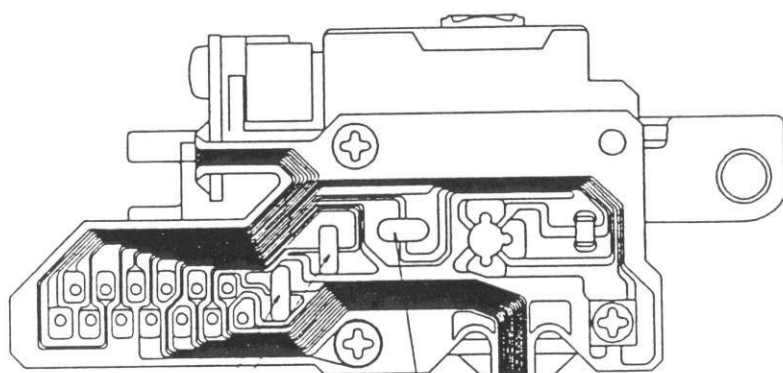

Short pattern for LD protection.


MECHANISM-EXPLODED VIEW

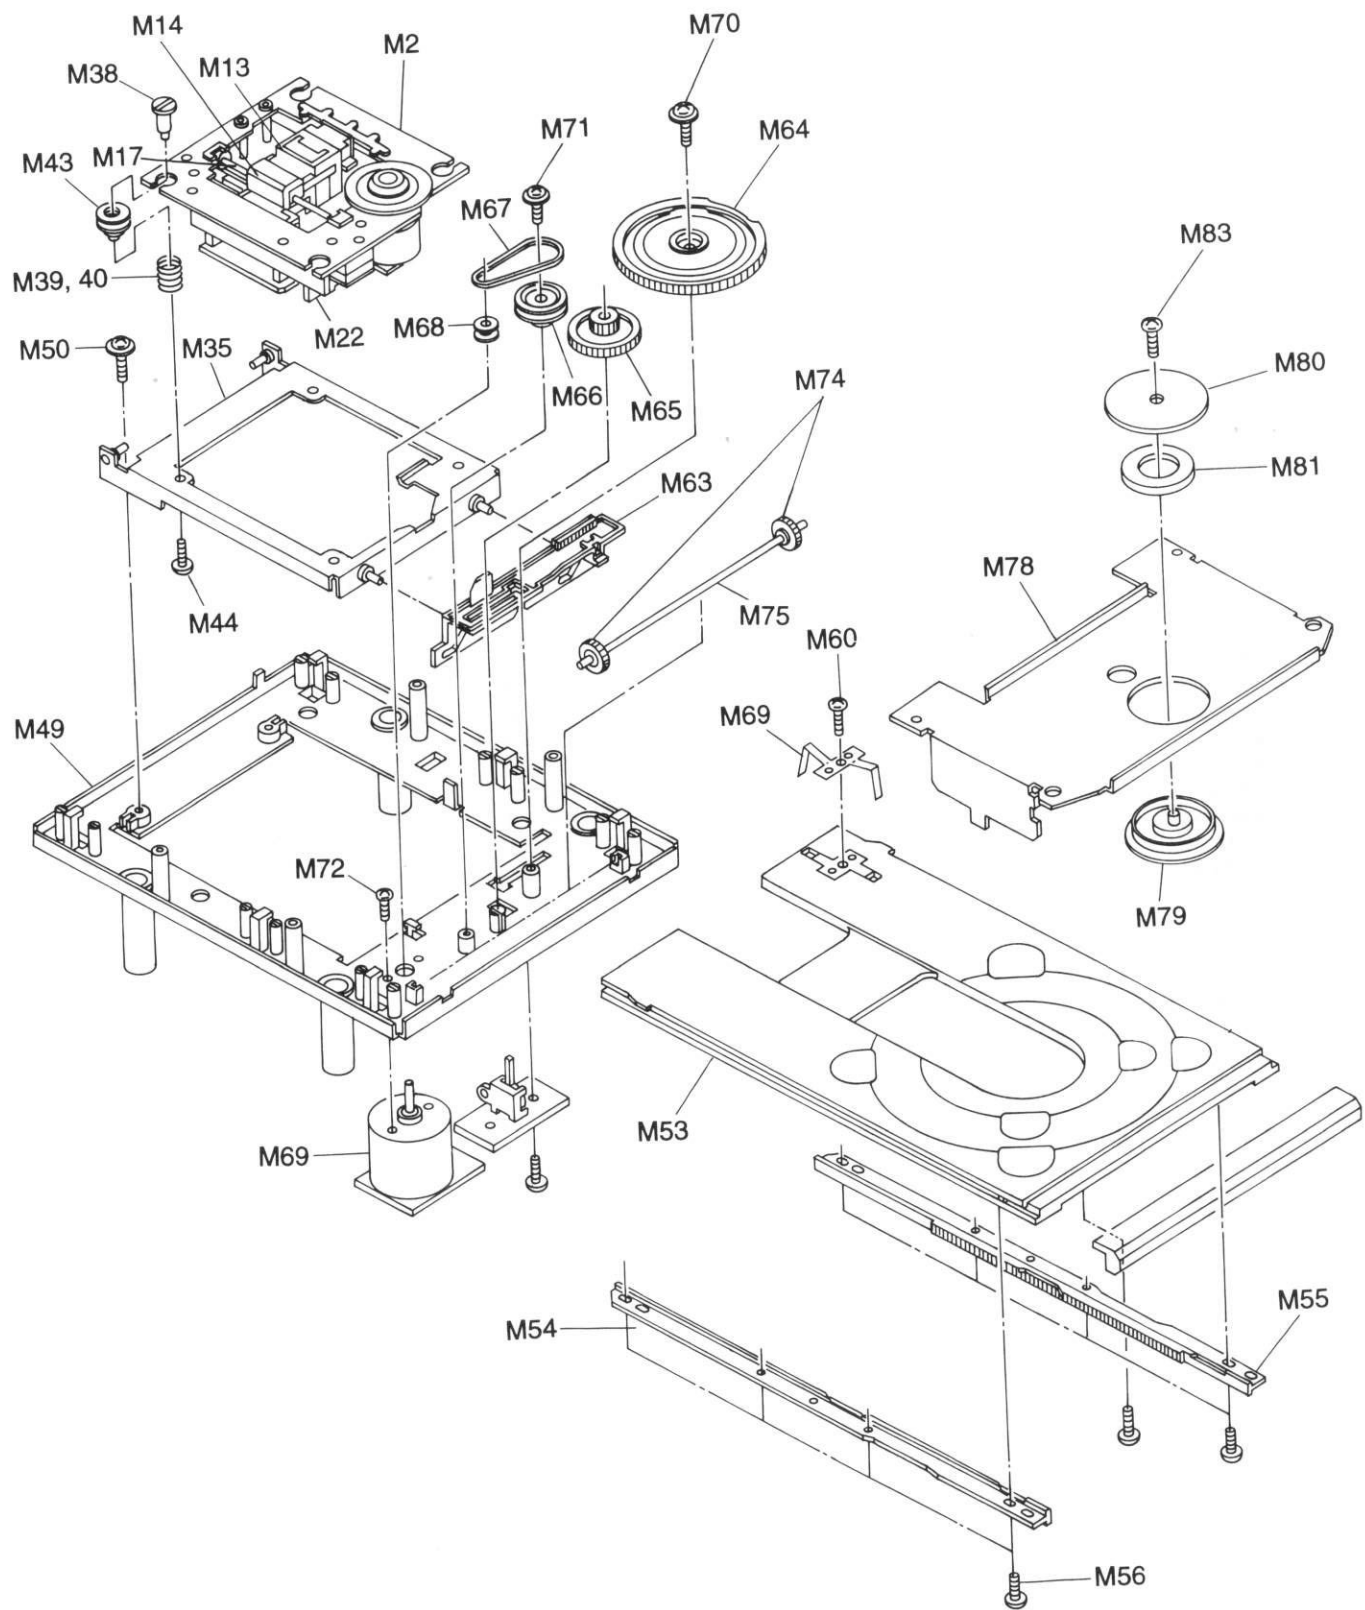

MECHANISM-PARTS LIST

REF NO.	PART NO.	DESCRIPTION
M2	24802023	CHASSIS (PU)AS
M13	24804019	PICK UP
M14	24840100	BLOCK (RET)
M17	24828013	SHAFT (PU)
M18	27270322	SPACER
M19	27270323	SPACER
M21	24804020	LINEAR MOTOR
M35	24802020	CHASSIS (SUB)AS
M38	24826007A-1	HOLDER (FLT)
M39	27180462	SPRING (FRG)
M40	27180461	SPRING (FLS)
M43	27301466A	CUSHION
M44	82142004	2P+4F(BC), SCREW
M49	24802022A	CHASSIS (MAIN)
M50	831430088	3TTW+8B(BC), SCREW
M53	24840101	DISC TRAY
M54	24810032	RACK (L)
M55	24810033	RACK (R)
M56	834426068	2.6TTS+6B(BC), SCREW
M59	24820031	PLATE (E)
M60	838430088	3TTB+8B(BC), SCREW
M63	24810034A	CAM PLATE
M64	24810035A	GEAR (MAIN)
M65	24810036	GEAR
M66	24810037	PULLEY
M67	24816012	BELT
M68	27300859A	PULLEY MO
M69	24502234A	MDH2B60, MOTOR
M70	831430088	3TTW+8B(BC), SCREW
M71	831426060	2.6TTW+6P(BC), SCREW
M72	82113003	3P+3F, SCREW
M74	24810038	GEAR (SYN)
M75	24828015	SHAFT (SYN)
M78	24840103	PLATE (CH)
M79	24824005	CAP (CH)
M80	27301344	YOKE (CH)
M81	28181019A	MAGNET
M83	833426050	2.6TTP+5P(BC), SCREW
M85	838430088	3TTB+8B(BC), SCREW
M86	2061112060UL	CRIMP AS
M92	1H302553-1	NAETC-5653-1
M93	2049041022	NCFC9-041022, FFC
M94	2042131022	NCFC2-131022, FFC
M95	834426068	2.6TTS+6B, (BC), SCREW

CHASSIS EXPLODED VIEW

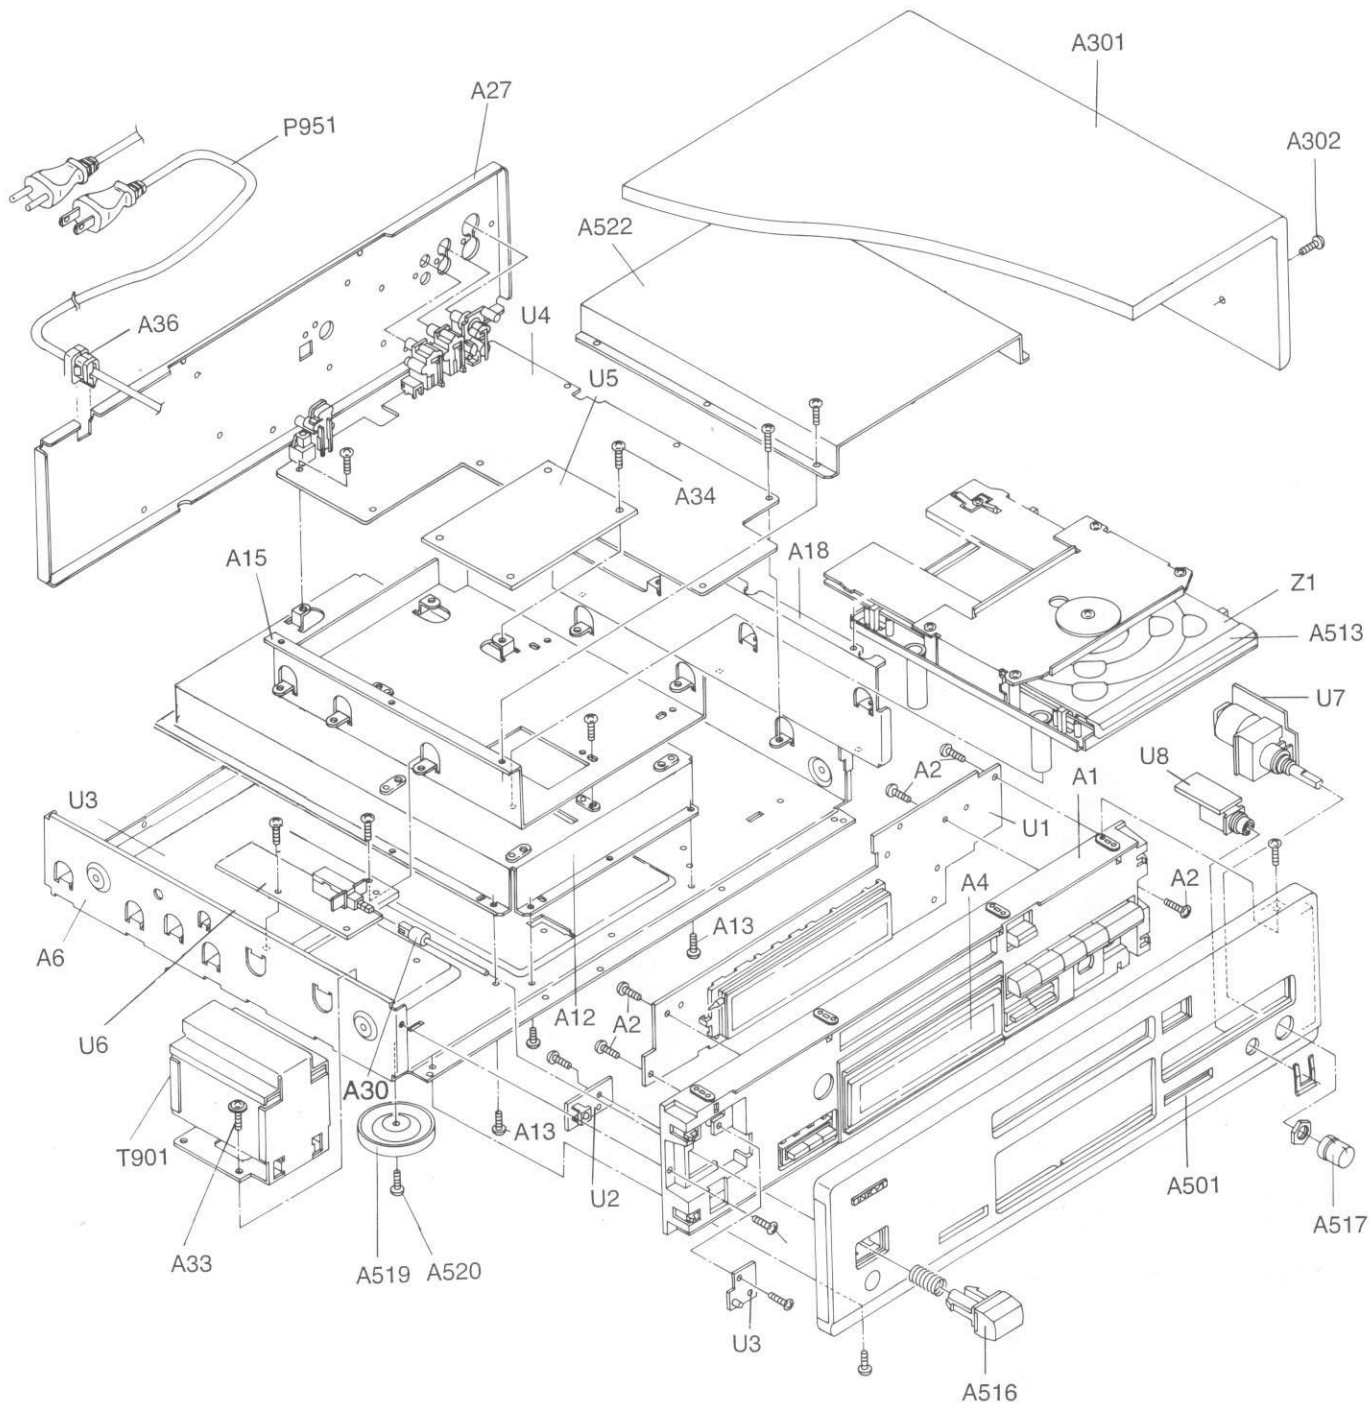

CHASSIS EXPLODED VIEW PARTS LIST

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
A1	27110912A	FRONT BRACKET ASS'Y 	A516	28325264	KNOB(POW)
	27110913A	FRONT BRACKET ASS'Y <S>		28325265	KNOB(POW) <S>
	27110904A	FRONT BRACKET ASS'Y <G>		28325238	KNOB(POW) <G>
A2	838130088	3TTB+8B, SCREW	A517	28325256	KNOB(BAL)
A3	28133349-1	BACK PLATE 		28325257	KNOB(BAL) <S>
	28133345	BACK PLATE <S,G>		28325258	KNOB(BAL) <G>
A4	28191731A	CLEAR PLATE	A519	27175311	LEG AS
A5	831430088	3TTW+8B(BC), SCREW	A520	831430088	3TTW+8B(BC), SCREW
A6	27100308-1	CHASSIS	A522	28184632-1	COVER(M)
A7	838430088	3TTB+8B(BC), SCREW	A523	838430088	3TTB+8B(BC), SCREW
A9	27130771	BRACKET(KZ)	A528	27190972	HOLDER(L)
A10	838130088	3TTB+8B, SCREW	A529	838230088	3TTB+8B(Ni), SCREW
A12	27130765-1	BRACKET(D)	A531	29361961	LABEL(ALL3)
A13	838430088	3TTB+8B(BC), SCREW	E801	2061112200UL	CRIMP AS
A14	28140761	t3x240x25, CUSHION	E802	2047271512	NCFC7-271512, FLAT CABLE
A15	27130766-1	BRACKET(U)	L901	230915	RBD25HA-00, CORE
A16	838130088	3TTB+8B, SCREW	L901A	831430088	3TTW+8B(BC), SCREW
A18	27130764	BRACKET(PC)	P951	△ 253174Y	AS-UC-6#18, AC CORD <D,C>
A19	838430088	3TTB+8B(BC), SCREW		△ 253148	AS-CEE, AC CORD <P,T,W>
A21	831430088	3TTW+8B(BC), SCREW		△ 253196HIT	AS-BS, AC CORD <E>
A26	27300833	WS-2NS, CLAMP	T901	△ 2301170	NPT-1260D, POWER TRANSFORMER <D,C>
A27	27122190	REAR PANEL <D,C>		△ 2301171	NPT-1260P, POWER TRANSFORMER <P,E,T>
	27122191	REAR PANEL <P,E,T>		△ 2301172	NPT-1260DG, POWER TRANSFORMER <W>
	27122192	REAR PANEL <W>	U1	1H302552-2	NAETC-5652-2
A28	838430088	3TTB+8B(BC), SCREW	U2	1H302549-2	NADIS-5649-2
A30	27273161	JOINT(POW)	U3	1H302557-2	NAETC-5657-2
A33	830440109	4TTC+10C(BC), SCREW	U4	1H302589-1A	NAAR-5689-1A <except W>
A34	838130088	3TTB+8B, SCREW		1H302589-1B	NAAR-5689-1B <W>
A36	△ 27300750	#2271, CORD BUSHING	U5	1H302590-1A	NADG-5690-1A <except W>
A301	28184635	TOP COVER 		1H302590-1B	NADG-5690-1B <W>
	28184636	TOP COVER <S>	U6	1H302591-1A	NASW-5691-1A <except W>
	28184637	TOP COVER <G>		1H302591-1B	NASW-5691-1B <W>
A302	838440088	4TTB+8B(BC), SCREW 	U7	1H302592-1A	NAAF-5692-1A <except W>
	838240088	4TTB+8B(Ni), SCREW <S,G>		1H302592-1B	NAAF-5692-1B <W>
A303	838430088	3TTB+8B(BC), SCREW	U8	1H302593-1A	NAAF-5693-1A <except W>
A304	28140761	t3x240x25, CUSHION		1H302593-1B	NAAF-5693-1B <W>
A501	27211794	FRONT PANEL 	U9	1H302594-1A	NASW-5694-1A <except W>
	27211795	FRONT PANEL <S>		1H302594-1B	NASW-5694-1B <W>
	27211796	FRONT PANEL <G>	Z1	1H301122	NCD-61, CD MECHANISM ASS'Y <S>
A502	28125307	END CAP(L) 		1H302122	NCD-61, CD MECHANISM ASS'Y
	28125309	END CAP(L) <S>		1H303122	NCD-61, CD MECHANISM ASS'Y <G>
	28125311	END CAP(L) <G>	Z2	838130088	3TTB+8B, SCREW
A503	28125308	END CAP(R) 	Z3	838430088	3TTB+8B(BC), SCREW
	28125310	END CAP(R) <S>			
	28125312	END CAP(R) <G>			
A504	27267913	GUIDE(POW) 			
	27267914	GUIDE(POW) <S>			
	27267915	GUIDE(POW) <G>			
A505	28191730	CLEAR PLATE(RE)			
A506	28198839	FACET(POW)			
A507	27267922A	GUIDE(PLAY) 			
	27267923A	GUIDE(PLAY) <S>			
	27267893A	GUIDE(PLAY) <G>			
A508	28135243	BADGE 			
	28135242	BADGE <S,G>			
A509	28141288	t0.8x19x15, CUSHION			
A511	801525	3TTB+8B(BC), SCREW			
A512	27267927	GUIDE(DO) 			
	27267928	GUIDE(DO) <S>			
	27267929	GUIDE(DO) <G>			
A513	28148334	DOOR 			
	28148335	DOOR <S>			
	28148333	DOOR <G>			
A514	834426068	2.6TTS+6B(BC), SCREW			

<S> : Silver model only
 : Black model only
<G> : Golden model only
<D> : 120V model only
<P> : 230V model only
<W> : Worldwide model only
<C> : Canadian model only
<E> : British model only
<T> : Taiwanese model only

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.


ADJUSTMENT PROCEDURE

Instrument required

Oscilloscope, Test disc (SONY YEDS-18),Jitter meter and AC voltmeter.

1. Slide Balance Adjustment

- 1. Connect the audio oscillator between the P155 sensor output and GND as shown bellow. (Ch.1)
 - 2. Turn on the switch of set. (Wait for a moment still focus serch finished.)
 - 3. Adjust the semi-fixed resistor R174 (pushing the S101) so that the waveform on the oscilloscope becomes 0V.
- (After checking the pickup go back to innermost positon.)

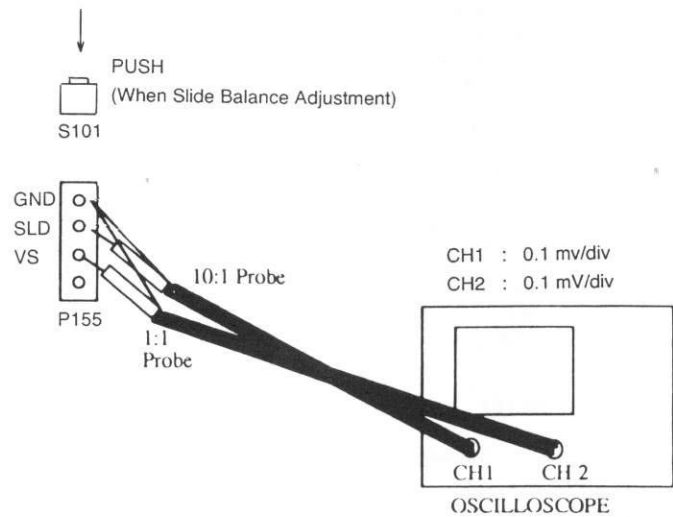

2. Slide Offset Adjustment

- 1. Connect the audio oscillator between P155 SLD output and GND.
 - 2. Turn on the switch of set. (Wait for a moment still focus serch finished.)
 - 3. Adjust the semi-fixed resistor R175 so that the waveform on the oscilloscope becomes 0V.
- (Check the GND positon of audio oscillator.)


3. confirmation of Jitter

- 1. Connect the jitter meter to P155, and confirm the jitter value is less than 14nSec.


4. Auto Adjustment

- 1. If you push the [UP] button and [DISPLAY] button together when the power switch turns ON,
 - 2. Insert the disc and closed by [OPEN/CLOSE] button, the disc will read in and autoadjustmen will start.
- you can enter to the Test mode.
- When the autoadjustmen finished, disc's information will displayed.
- At times error message (Er Fg, Er Fe) will displayed, but it is not bud condition.
- Push the [OPEN/CLOSE] button and [DIGITAL OUT] button togther When the power ON no disc condition, you will cancel the test mode.

BLOCK DIAGRAM

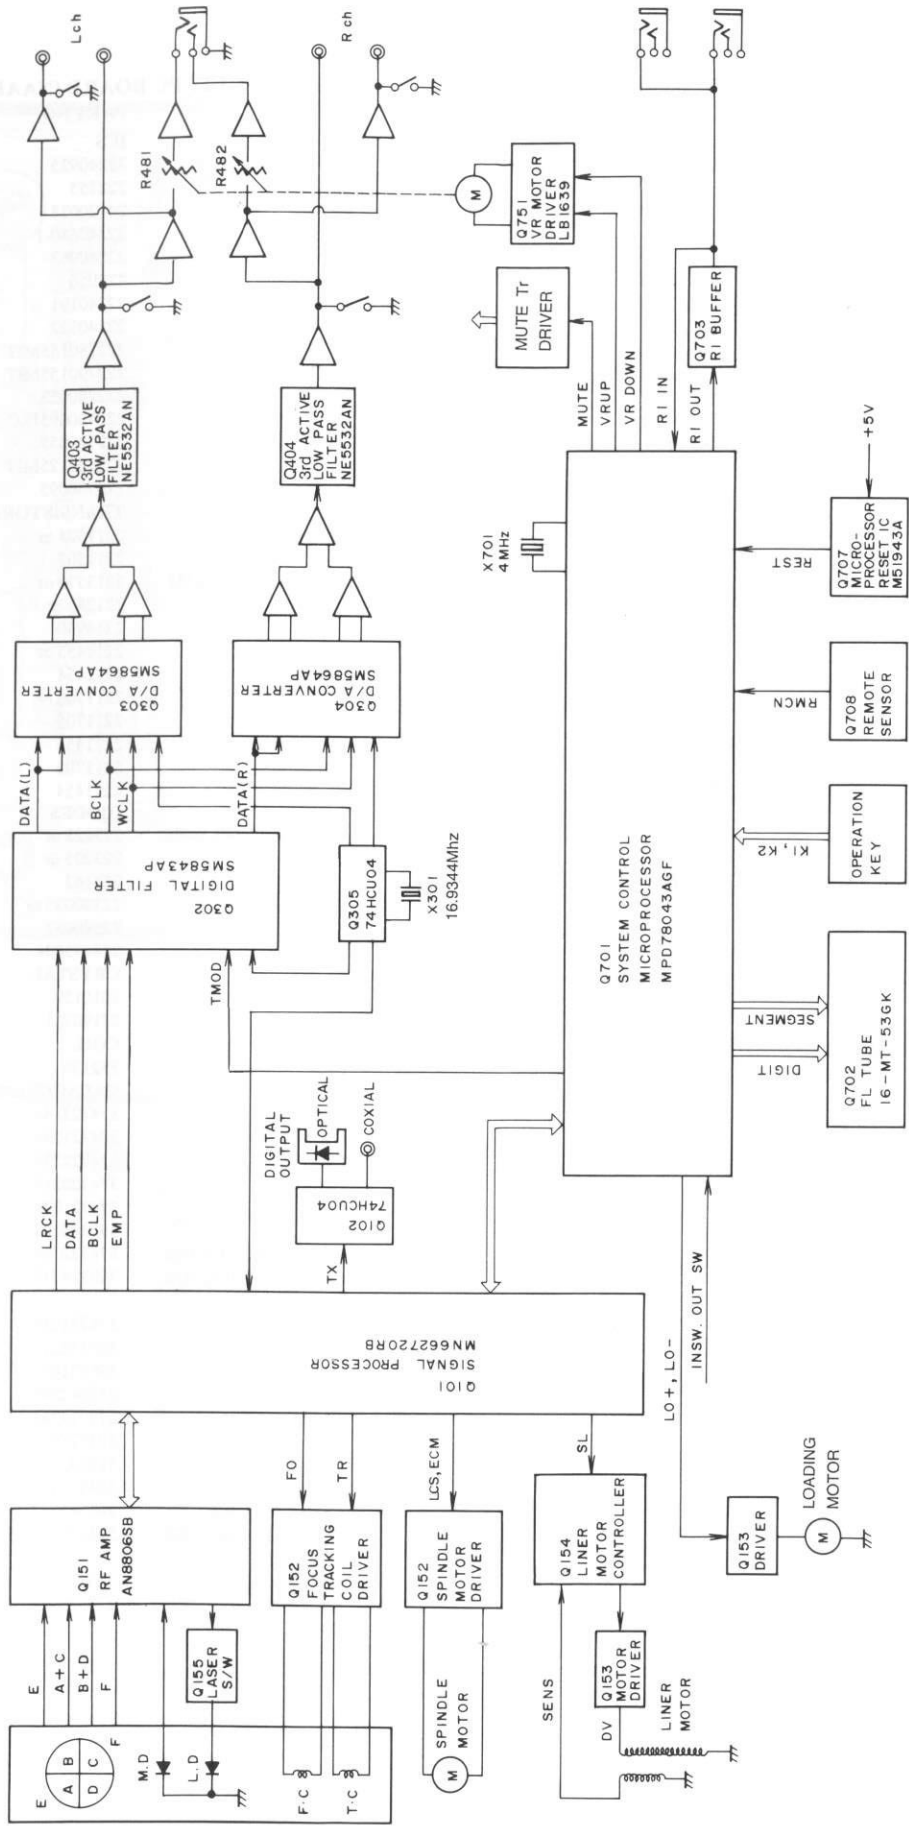


MECHANISM-EXPLODED VIEW

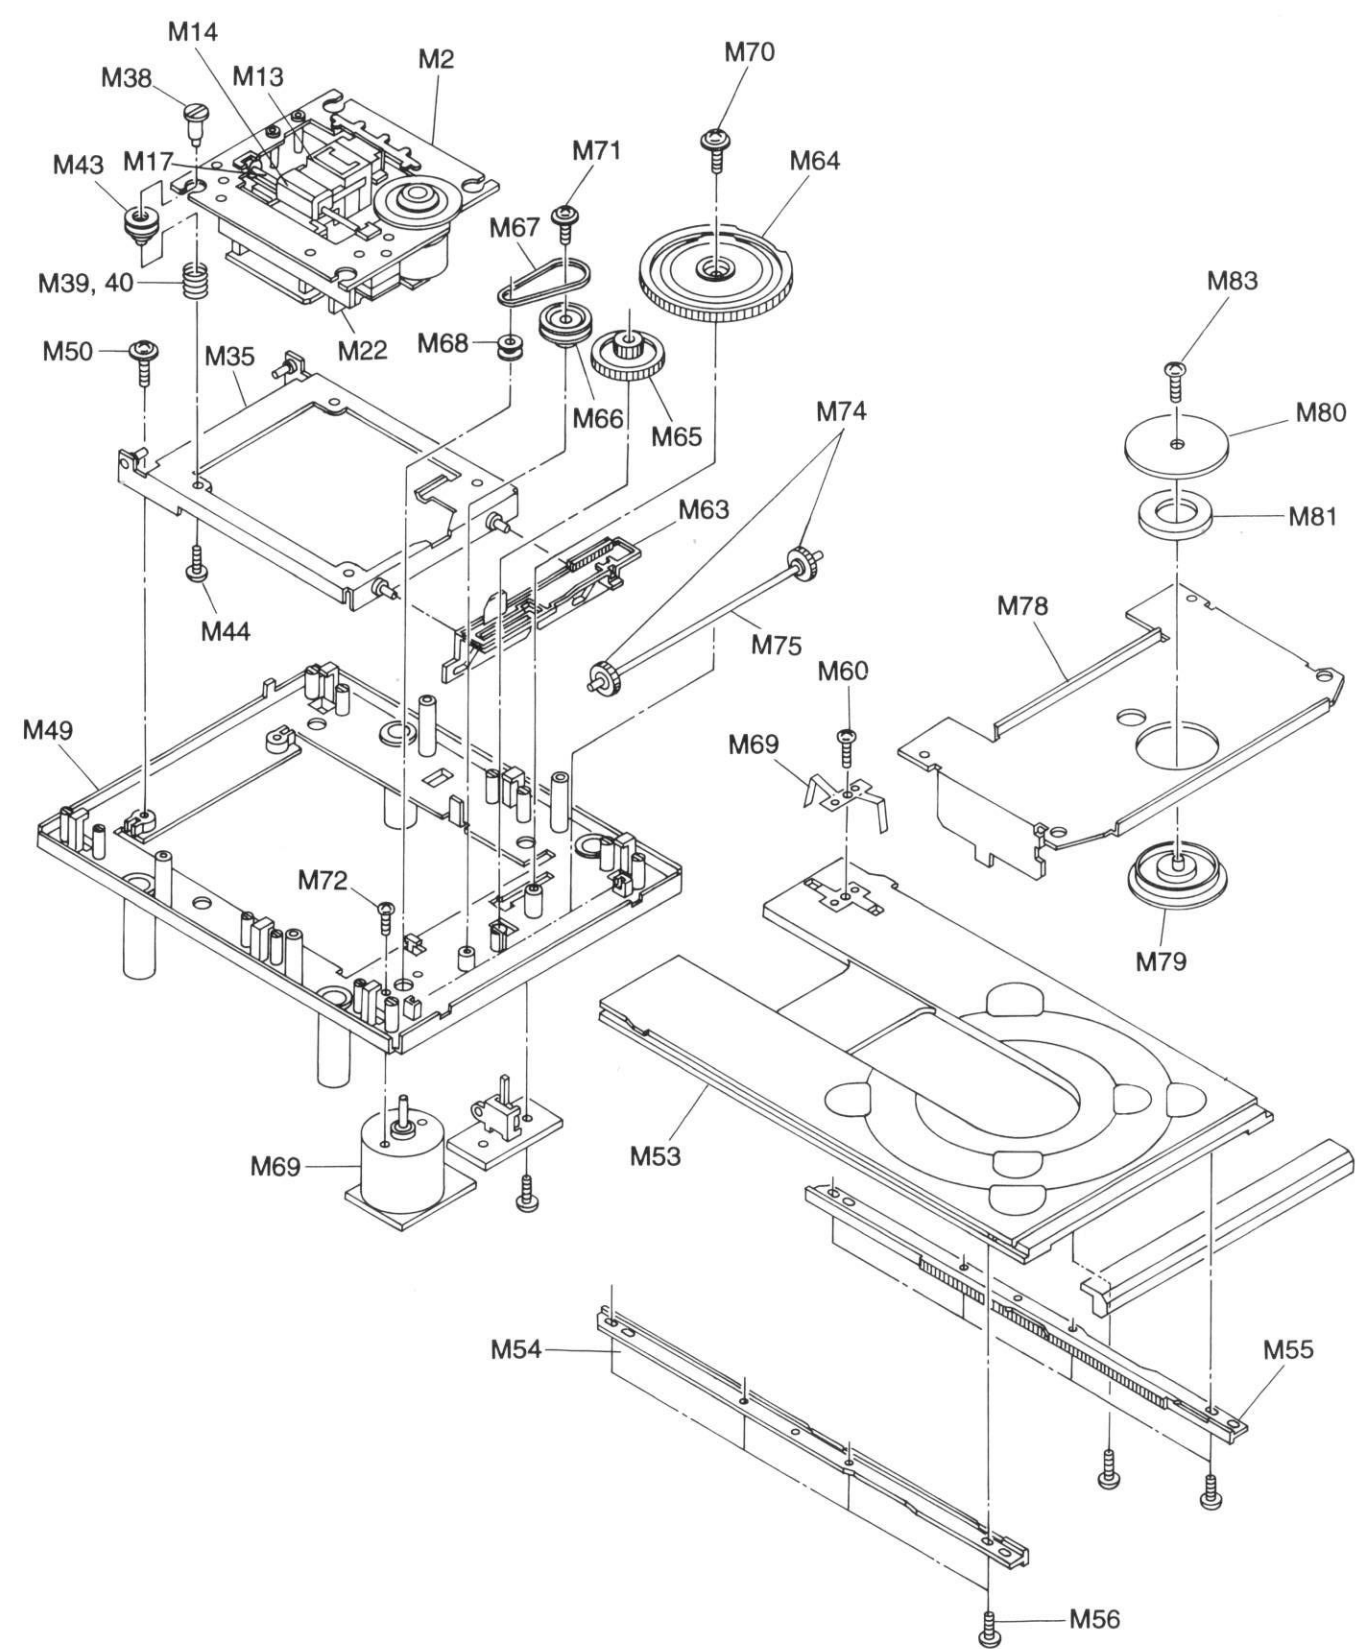

MECHANISM-PARTS LIST

REF NO.	PART NO.	DESCRIPTION
M2	24802023	CHASSIS (PU)AS
M13	24804019	PICK UP
M14	24840100	BLOCK (RET)
M17	24828013	SHAFT (PU)
M18	27270322	SPACER
M19	27270323	SPACER
M21	24804020	LINEAR MOTOR
M35	24802020	CHASSIS (SUB)AS
M38	24826007A-1	HOLDER (FLT)
M39	27180462	SPRING (FRG)
M40	27180461	SPRING (FLS)
M43	27301466A	CUSHION
M44	82142004	2P+4F(BC), SCREW
M49	24802022A	CHASSIS (MAIN)
M50	831430088	3TTW+8B(BC), SCREW
M53	24840101	DISC TRAY
M54	24810032	RACK (L)
M55	24810033	RACK (R)
M56	834426068	2.6TTS+6B(BC), SCREW
M59	24820031	PLATE (E)
M60	838430088	3TTB+8B(BC), SCREW
M63	24810034A	CAM PLATE
M64	24810035A	GEAR (MAIN)
M65	24810036	GEAR
M66	24810037	PULLEY
M67	24816012	BELT
M68	27300859A	PULLEY MO
M69	24502234A	MDH2B60, MOTOR
M70	831430088	3TTW+8B(BC), SCREW
M71	831426060	2.6TTW+6P(BC), SCREW
M72	82113003	3P+3F, SCREW
M74	24810038	GEAR (SYN)
M75	24828015	SHAFT (SYN)
M78	24840103	PLATE (CH)
M79	24824005	CAP (CH)
M80	27301344	YOKE (CH)
M81	28181019A	MAGNET
M83	833426050	2.6TTP+5P(BC), SCREW
M85	838430088	3TTB+8B(BC), SCREW
M86	2061112060UL	CRIMP AS
M92	1H302553-1	NAETC-5653-1
M93	2049041022	NCFC9-041022, FFC
M94	2042131022	NCFC2-131022, FFC
M95	834426068	2.6TTS+6B, (BC), SCREW

SCHEMATIC DIAGRAM

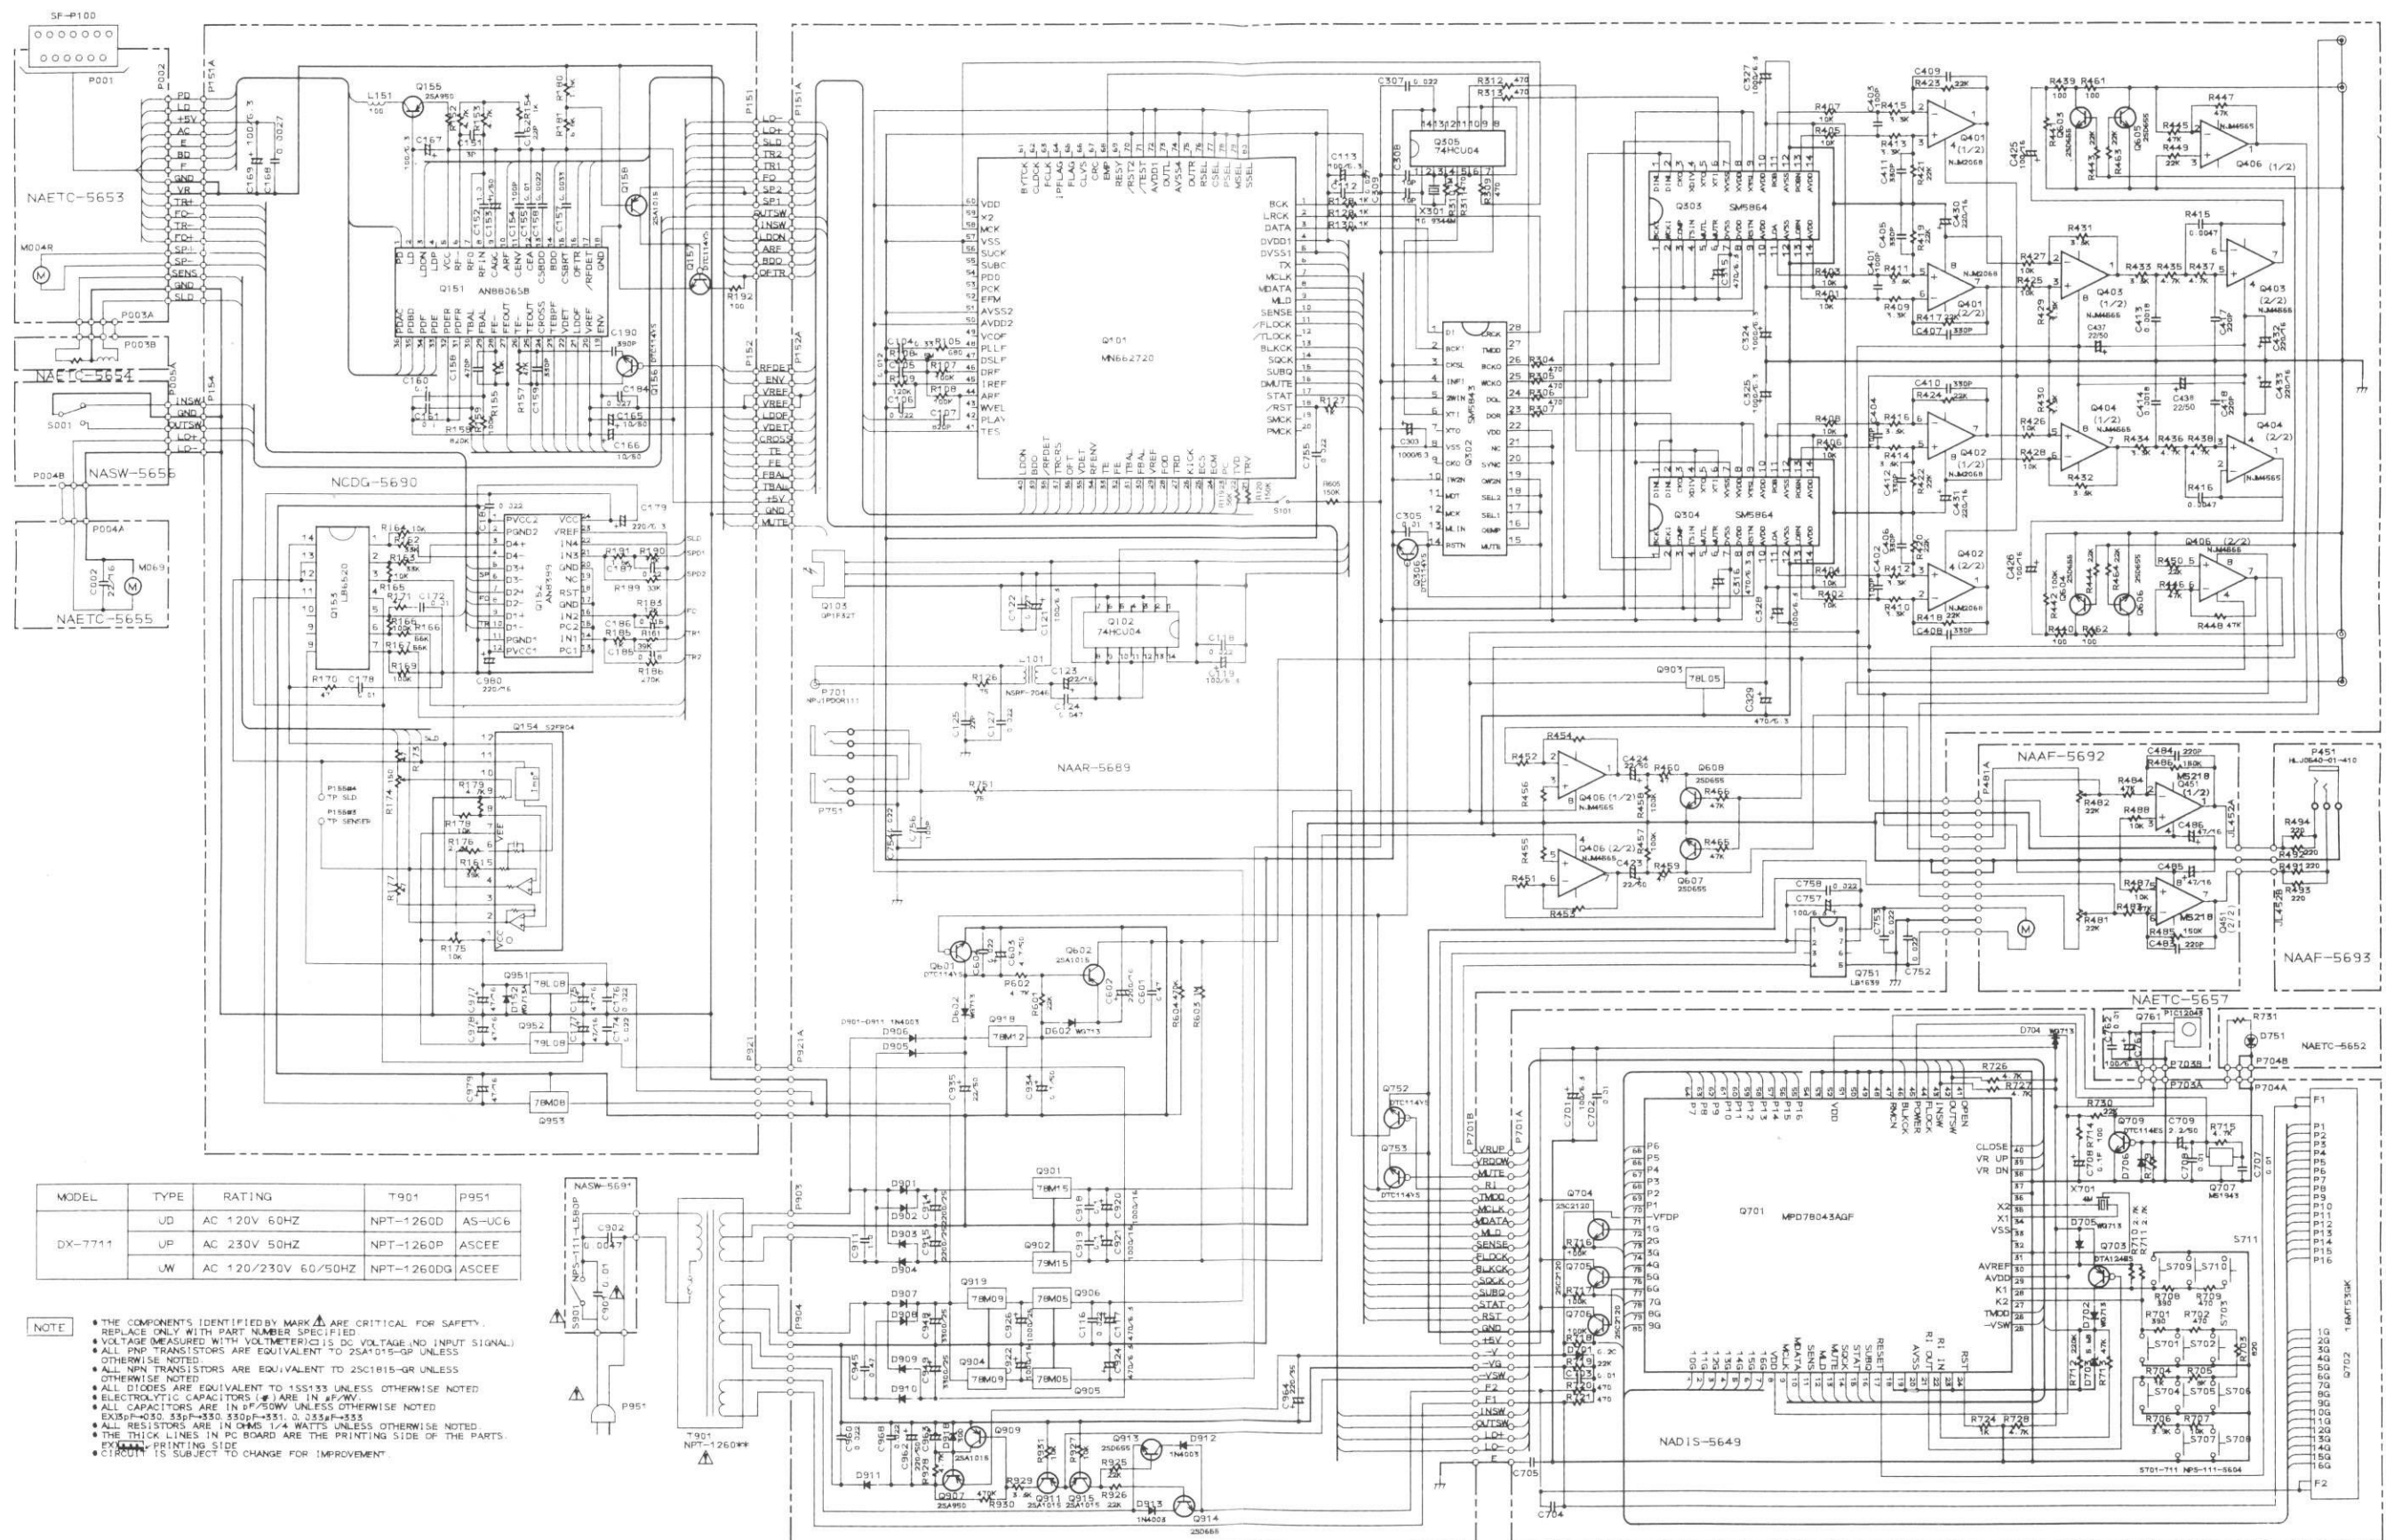


CAUTION ON REPLACEMENT OF PICKUP

The laser diode in the optical pickup block is so sensitive to static electricity, surge current and etc. that the components are liable to be broken down or its reliability remarkably deteriorated.


During repair, carefully take the following precautions.

1. When replacing the optical pickup, first short the LD terminals and remove the connector. Also, when attaching the new optical pickup, after attaching the connector, unsolder the LD terminals.
2. Do not touch the optical pickup object lens with the hands.

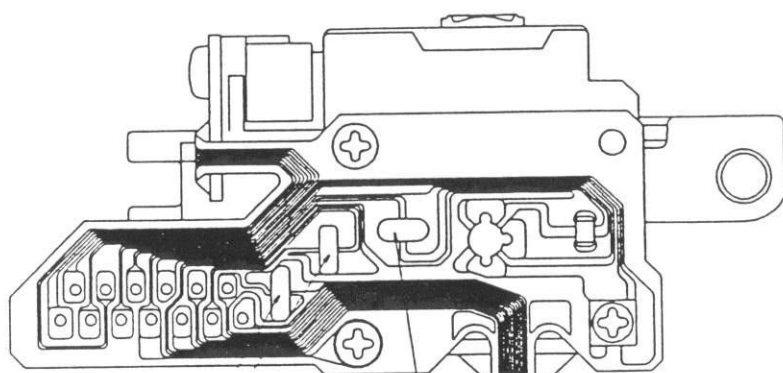

Short pattern for LD protection.


MECHANISM-EXPLODED VIEW

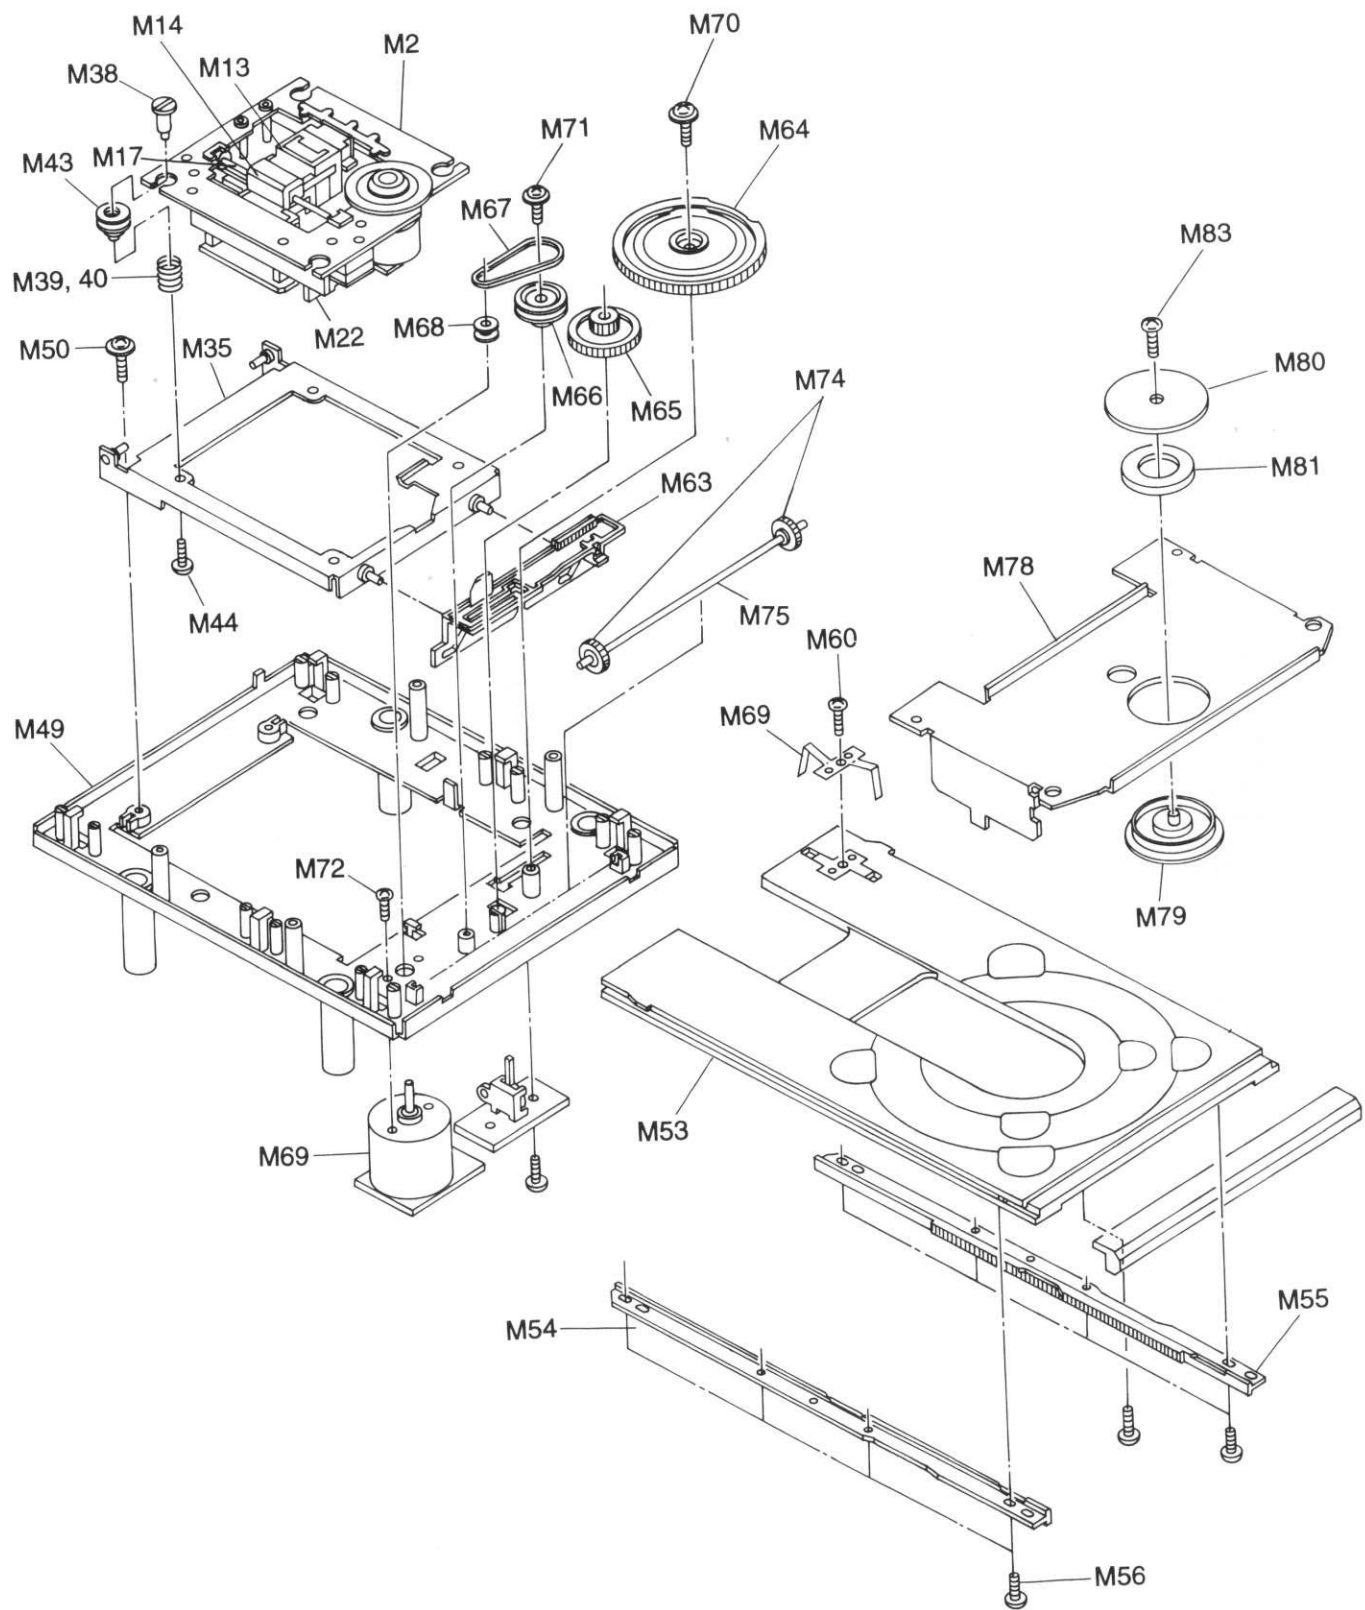

MECHANISM-PARTS LIST

REF NO.	PART NO.	DESCRIPTION
M2	24802023	CHASSIS (PU)AS
M13	24804019	PICK UP
M14	24840100	BLOCK (RET)
M17	24828013	SHAFT (PU)
M18	27270322	SPACER
M19	27270323	SPACER
M21	24804020	LINEAR MOTOR
M35	24802020	CHASSIS (SUB)AS
M38	24826007A-1	HOLDER (FLT)
M39	27180462	SPRING (FRG)
M40	27180461	SPRING (FLS)
M43	27301466A	CUSHION
M44	82142004	2P+4F(BC), SCREW
M49	24802022A	CHASSIS (MAIN)
M50	831430088	3TTW+8B(BC), SCREW
M53	24840101	DISC TRAY
M54	24810032	RACK (L)
M55	24810033	RACK (R)
M56	834426068	2.6TTS+6B(BC), SCREW
M59	24820031	PLATE (E)
M60	838430088	3TTB+8B(BC), SCREW
M63	24810034A	CAM PLATE
M64	24810035A	GEAR (MAIN)
M65	24810036	GEAR
M66	24810037	PULLEY
M67	24816012	BELT
M68	27300859A	PULLEY MO
M69	24502234A	MDH2B60, MOTOR
M70	831430088	3TTW+8B(BC), SCREW
M71	831426060	2.6TTW+6P(BC), SCREW
M72	82113003	3P+3F, SCREW
M74	24810038	GEAR (SYN)
M75	24828015	SHAFT (SYN)
M78	24840103	PLATE (CH)
M79	24824005	CAP (CH)
M80	27301344	YOKE (CH)
M81	28181019A	MAGNET
M83	833426050	2.6TTP+5P(BC), SCREW
M85	838430088	3TTB+8B(BC), SCREW
M86	2061112060UL	CRIMP AS
M92	1H302553-1	NAETC-5653-1
M93	2049041022	NCFC9-041022, FFC
M94	2042131022	NCFC2-131022, FFC
M95	834426068	2.6TTS+6B, (BC), SCREW

CHASSIS EXPLODED VIEW

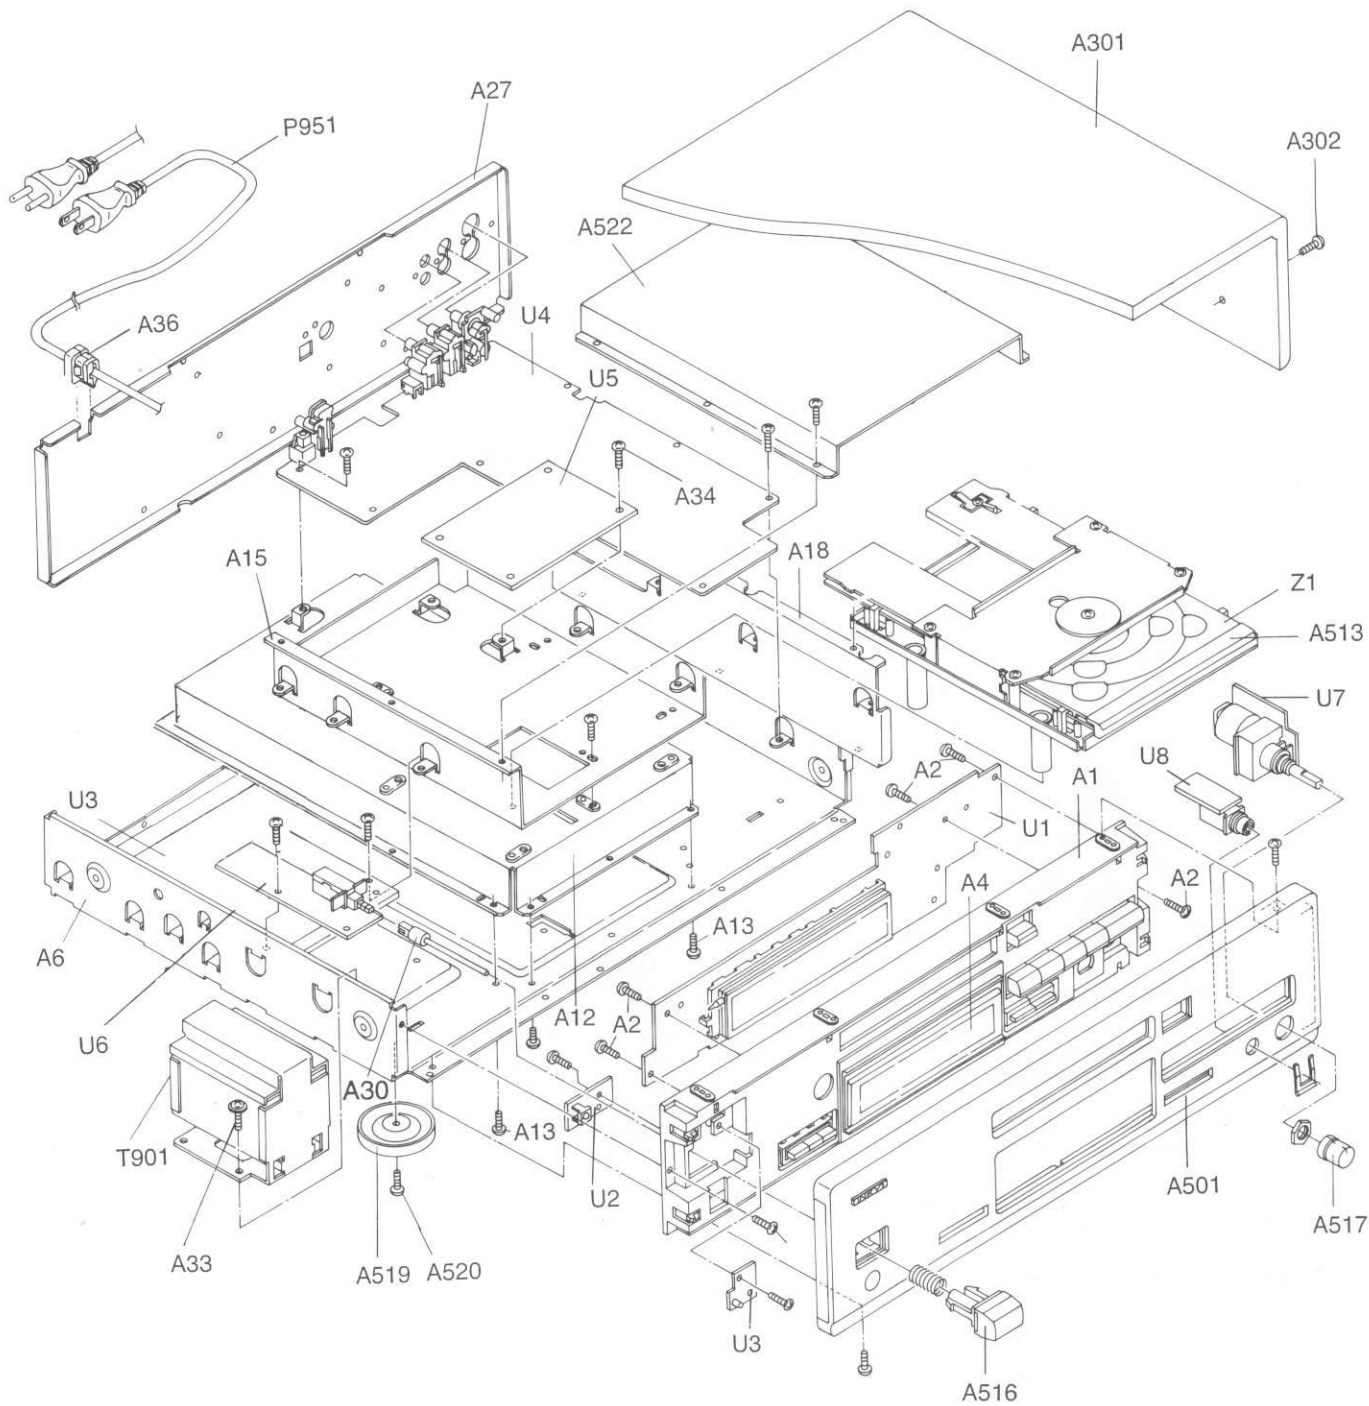

CHASSIS EXPLODED VIEW PARTS LIST

REF NO.	PART NO.	DESCRIPTION	REF NO.	PART NO.	DESCRIPTION
A1	27110912A	FRONT BRACKET ASS'Y 	A516	28325264	KNOB(POW)
	27110913A	FRONT BRACKET ASS'Y <S>		28325265	KNOB(POW) <S>
	27110904A	FRONT BRACKET ASS'Y <G>		28325238	KNOB(POW) <G>
A2	838130088	3TTB+8B, SCREW	A517	28325256	KNOB(BAL)
A3	28133349-1	BACK PLATE 		28325257	KNOB(BAL) <S>
	28133345	BACK PLATE <S,G>		28325258	KNOB(BAL) <G>
A4	28191731A	CLEAR PLATE	A519	27175311	LEG AS
A5	831430088	3TTW+8B(BC), SCREW	A520	831430088	3TTW+8B(BC), SCREW
A6	27100308-1	CHASSIS	A522	28184632-1	COVER(M)
A7	838430088	3TTB+8B(BC), SCREW	A523	838430088	3TTB+8B(BC), SCREW
A9	27130771	BRACKET(KZ)	A528	27190972	HOLDER(L)
A10	838130088	3TTB+8B, SCREW	A529	838230088	3TTB+8B(Ni), SCREW
A12	27130765-1	BRACKET(D)	A531	29361961	LABEL(ALL3)
A13	838430088	3TTB+8B(BC), SCREW	E801	2061112200UL	CRIMP AS
A14	28140761	t3x240x25, CUSHION	E802	2047271512	NCFC7-271512, FLAT CABLE
A15	27130766-1	BRACKET(U)	L901	230915	RBD25HA-00, CORE
A16	838130088	3TTB+8B, SCREW	L901A	831430088	3TTW+8B(BC), SCREW
A18	27130764	BRACKET(PC)	P951	△ 253174Y	AS-UC-6#18, AC CORD <D,C>
A19	838430088	3TTB+8B(BC), SCREW		△ 253148	AS-CEE, AC CORD <P,T,W>
A21	831430088	3TTW+8B(BC), SCREW		△ 253196HIT	AS-BS, AC CORD <E>
A26	27300833	WS-2NS, CLAMP	T901	△ 2301170	NPT-1260D, POWER TRANSFORMER <D,C>
A27	27122190	REAR PANEL <D,C>		△ 2301171	NPT-1260P, POWER TRANSFORMER <P,E,T>
	27122191	REAR PANEL <P,E,T>		△ 2301172	NPT-1260DG, POWER TRANSFORMER <W>
	27122192	REAR PANEL <W>	U1	1H302552-2	NAETC-5652-2
A28	838430088	3TTB+8B(BC), SCREW	U2	1H302549-2	NADIS-5649-2
A30	27273161	JOINT(POW)	U3	1H302557-2	NAETC-5657-2
A33	830440109	4TTC+10C(BC), SCREW	U4	1H302589-1A	NAAR-5689-1A <except W>
A34	838130088	3TTB+8B, SCREW		1H302589-1B	NAAR-5689-1B <W>
A36	△ 27300750	#2271, CORD BUSHING	U5	1H302590-1A	NADG-5690-1A <except W>
A301	28184635	TOP COVER 		1H302590-1B	NADG-5690-1B <W>
	28184636	TOP COVER <S>	U6	1H302591-1A	NASW-5691-1A <except W>
	28184637	TOP COVER <G>		1H302591-1B	NASW-5691-1B <W>
A302	838440088	4TTB+8B(BC), SCREW 	U7	1H302592-1A	NAAF-5692-1A <except W>
	838240088	4TTB+8B(Ni), SCREW <S,G>		1H302592-1B	NAAF-5692-1B <W>
A303	838430088	3TTB+8B(BC), SCREW	U8	1H302593-1A	NAAF-5693-1A <except W>
A304	28140761	t3x240x25, CUSHION		1H302593-1B	NAAF-5693-1B <W>
A501	27211794	FRONT PANEL 	U9	1H302594-1A	NASW-5694-1A <except W>
	27211795	FRONT PANEL <S>		1H302594-1B	NASW-5694-1B <W>
	27211796	FRONT PANEL <G>	Z1	1H301122	NCD-61, CD MECHANISM ASS'Y <S>
A502	28125307	END CAP(L) 		1H302122	NCD-61, CD MECHANISM ASS'Y
	28125309	END CAP(L) <S>		1H303122	NCD-61, CD MECHANISM ASS'Y <G>
	28125311	END CAP(L) <G>	Z2	838130088	3TTB+8B, SCREW
A503	28125308	END CAP(R) 	Z3	838430088	3TTB+8B(BC), SCREW
	28125310	END CAP(R) <S>			
	28125312	END CAP(R) <G>			
A504	27267913	GUIDE(POW) 			
	27267914	GUIDE(POW) <S>			
	27267915	GUIDE(POW) <G>			
A505	28191730	CLEAR PLATE(RE)			
A506	28198839	FACET(POW)			
A507	27267922A	GUIDE(PLAY) 			
	27267923A	GUIDE(PLAY) <S>			
	27267893A	GUIDE(PLAY) <G>			
A508	28135243	BADGE 			
	28135242	BADGE <S,G>			
A509	28141288	t0.8x19x15, CUSHION			
A511	801525	3TTB+8B(BC), SCREW			
A512	27267927	GUIDE(DO) 			
	27267928	GUIDE(DO) <S>			
	27267929	GUIDE(DO) <G>			
A513	28148334	DOOR 			
	28148335	DOOR <S>			
	28148333	DOOR <G>			
A514	834426068	2.6TTS+6B(BC), SCREW			

<S> : Silver model only
 : Black model only
<G> : Golden model only
<D> : 120V model only
<P> : 230V model only
<W> : Worldwide model only
<C> : Canadian model only
<E> : British model only
<T> : Taiwanese model only

NOTE: THE COMPONENTS IDENTIFIED BY MARK △ ARE CRITICAL FOR RISK OF FIRE AND ELECTRIC SHOCK. REPLACE ONLY WITH PART NUMBER SPECIFIED.